
kedro-mflow

Release 0.12.2

Yolan Honoré-Rougé

Apr 21, 2024

CONTENTS

1	Introduction	1
1.1	Introduction	1
1.1.1	What is Kedro?	1
1.1.2	What is Mlflow?	1
1.1.3	A brief comparison between Kedro and Mlflow	2
1.1.3.1	Configuration and prototyping: Kedro 1 - 0 Mlflow	2
1.1.3.2	Versioning: Kedro 1 - 1 Mlflow	2
1.1.3.3	Model packaging and service: Kedro 1 - 2 Mlflow	3
1.1.3.4	Conclusion: Use Kedro and add Mlflow for machine learning projects	3
1.2	Motivation	3
1.2.1	When should I use kedro-mlflow?	3
1.2.2	Why should I use kedro-mlflow?	4
1.2.2.1	Benchmark of existing solutions	4
1.2.2.2	Enforcing Kedro principles	4
2	Introduction	5
2.1	Installation guide	5
2.1.1	Pre-requisites	5
2.1.1.1	Create a virtual environment	5
2.1.1.2	Check your kedro version	5
2.1.2	Install the plugin	6
2.1.2.1	Install from PyPI	6
2.1.2.2	Install from sources	6
2.1.3	Check the installation	6
2.1.4	Available commands	6
2.2	Initialize your Kedro project	7
2.2.1	Create a kedro project	7
2.2.2	Activate kedro-mlflow in your kedro project	7
2.2.2.1	Setting up the kedro-mlflow configuration file	7
2.2.2.2	Declaring kedro-mlflow hooks	8
2.2.2.2.1	Declaring hooks through auto-discovery (for kedro>=0.16.4) [Default behaviour]	8
2.2.2.2.2	Declaring hooks statically in settings.py	8
2.3	Migration guide	8
2.3.1	Migration from 0.10.x to 0.11.x	8
2.3.2	Migration from 0.9.x to 0.10.x	9
2.3.3	Migration from 0.8.x to 0.9.x	9
2.3.4	Migration from 0.7.x to 0.8.x	9
2.3.5	Migration from 0.6.x to 0.7.x	10
2.3.6	Migration from 0.5.x to 0.6.x	10

2.3.7	Migration from 0.4.x to 0.5.x	10
2.3.8	Migration from 0.4.0 to 0.4.1	10
2.3.9	Migration from 0.3.x to 0.4.x	10
2.3.9.1	Catalog entries	10
2.3.9.2	Hooks	10
2.3.9.3	KedroPipelineModel	11
3	Introduction	13
3.1	Goal of the tutorial	13
3.2	Example project	13
3.2.1	Install the plugin in a virtual environment	13
3.2.2	Install the toy project	13
3.2.2.1	Installation with <code>kedro>=0.19.0</code>	14
3.2.2.2	Installation with <code>kedro>=0.16.3</code>	14
3.2.2.3	Installation with <code>kedro>=0.16.0, <=0.16.2</code>	14
3.2.3	Install dependencies	15
3.3	First steps with the plugin	15
3.3.1	Initialize kedro-mlflow	15
3.3.2	Run the pipeline	17
3.3.3	Open the UI	20
3.3.3.1	Parameters versioning	22
3.3.3.2	Journal information	24
3.3.3.3	Artifacts	24
3.3.4	Going further	25
4	Introduction	27
4.1	Configure mlflow inside your project	27
4.1.1	Context: mlflow tracking under the hood	27
4.1.2	The <code>mlflow.yml</code> file	28
4.1.2.1	Configure the tracking server	28
4.1.2.1.1	Configure the tracking and registry uri	28
4.1.2.1.2	Configure the credentials	29
4.1.2.1.2.1	Default credentials with environment variables	29
4.1.2.1.2.2	Authentication with expiring tokens	29
4.1.2.2	Deactivate tracking under conditions	30
4.1.2.3	Configure mlflow experiment	30
4.1.2.4	Configure the run	30
4.1.2.5	Extra tracking configuration	31
4.1.2.6	Configure the user interface	32
4.1.3	Overwrite configuration at runtime	32
4.2	Parameters versioning	33
4.2.1	Automatic parameters versioning	33
4.2.2	How does <code>MlflowNodeHook</code> operates under the hood?	33
4.2.3	Frequently Asked Questions	33
4.2.3.1	Will parameters be recorded if the pipeline fails during execution?	33
4.2.3.2	How are parameters detected by the plugin?	34
4.3	Versioning Kedro DataSets	34
4.3.1	What is artifact tracking?	34
4.3.2	How to version data in a kedro project?	34
4.3.3	Frequently asked questions	35
4.3.3.1	Can I pass extra parameters to the <code>MlflowArtifactDataset</code> for finer control?	35
4.3.3.2	Can I use the <code>MlflowArtifactDataset</code> in interactive mode?	35
4.3.3.3	How do I upload an artifact to a non local destination (e.g. an S3 or blob storage)?	35
4.3.3.4	Can I log an artifact in a specific run?	36

4.3.3.5	Can I reload an artifact from an existing run to use it in another run ?	36
4.3.3.6	Can I create a remote folder/subfolders architecture to organize the artifacts?	36
4.4	Version model	37
4.4.1	What is model tracking?	37
4.4.2	How to track models using MLflow in Kedro project?	37
4.4.3	Frequently asked questions?	37
4.4.3.1	How is it working under the hood?	37
4.4.3.2	How can I track a custom MLflow model flavor?	38
4.4.3.3	How can I save model locally and log it in MLflow in one step?	38
4.5	Version metrics	38
4.5.1	What is metric tracking?	38
4.5.2	How to version metrics in a kedro project?	39
4.5.2.1	Saving a single float as a metric with <code>MlflowMetricDataset</code>	39
4.5.2.2	Saving the evolution of a metric during training with <code>MlflowMetricHistoryDataset</code>	40
4.5.2.3	Saving several metrics with their entire history with <code>MlflowMetricsHistoryDataset</code>	41
4.5.3	How to return metrics from a node?	42
4.6	Opening the UI	43
4.6.1	The mlflow user interface	43
4.6.2	The <code>kedro-mlflow</code> helper	43
5	Introduction	45
5.1	Pipeline serving with <code>kedro-mlflow</code>	45
5.1.1	Introduction to Mlflow Models	45
5.1.2	Pre-requisite for serving a pipeline	45
5.2	Register a pipeline to mlflow with <code>KedroPipelineModel</code> custom mlflow model	46
5.3	Register a pipeline to mlflow with <code>KedroPipelineModel</code> custom mlflow model	47
5.4	Automatically log an inference after running the training pipeline	47
5.4.1	Getting started	47
5.4.2	Complete step by step demo project with code	48
5.4.3	Motivation	49
5.5	Deployment patterns for kedro pipelines	49
6	Introduction	51
6.1	Why we need a mlops framework to manage machine learning development lifecycle	51
6.1.1	Machine learning deployment is hard because it comes with a lot of constraints and no adequate tooling	51
6.1.1.1	Identifying the challenges to address when deploying machine learning	51
6.1.1.2	A comparison between traditional software development and machine learning projects	52
6.1.1.2.1	ML and traditional software have different moving parts	52
6.1.1.2.2	ML and traditional software have different development lifecycles	53
6.1.2	Deployment issues addressed by <code>kedro-mlflow</code> and their solutions	53
6.1.2.1	Out of scope	53
6.1.2.2	Issue 1: The training process is poorly reproducible	54
6.1.2.3	Issue 2: The data scientist and stakeholders focus on training	54
6.1.2.4	Issue 3: Inference and training are entirely decoupled	54
6.1.2.5	Issue 4: Data scientists do not handle business objects	55
6.1.2.6	Overcoming these problems: support an organisational solution with an efficient tool	55
6.2	The components of a machine learning application	55
6.2.1	Definition: apps of a machine learning projects	55
6.2.2	Difference between an app and a Kedro pipeline	56
6.2.3	Apps development lifecycle in a machine learning project	56
6.2.3.1	The data scientist creates at least part of the 3 apps	56
6.2.3.2	The <code>etl_app</code>	57

6.2.3.3	The <i>ml_app</i>	57
6.2.3.4	The <i>user_app</i>	57
6.3	kedro-mlflow mlops solution	58
6.3.1	Reminder	58
6.3.2	Enforcing these principles with a dedicated tool	58
6.3.2.1	Synchronizing training and inference pipeline	58
6.3.2.2	Packaging and serving a Kedro Pipeline	59
6.3.2.3	kedro-mlflow's magic: inference autologging	60
6.3.2.4	Reuse the model in kedro	60
7	Introduction	61
7.1	How to use kedro-mlflow in a notebook	61
7.1.1	Reminder on mlflow's limitations with interactive use	61
7.1.2	Setup mlflow configuration in your notebook	61
7.1.3	Difference with running through the CLI	62
7.1.4	Guidelines and best practices suggestions	62
8	Introduction	63
8.1	New DataSet	63
8.1.1	MlflowArtifactDataSet	63
8.1.2	Metrics DataSets	64
8.1.2.1	MlflowMetricDataSet	64
8.1.2.2	MlflowMetricHistoryDataSet	64
8.1.3	Models DataSets	64
8.1.3.1	MlflowModelTrackingDataSet	64
8.1.3.2	MlflowModelLocalFileSystemDataSet	65
8.1.3.3	MlflowModelRegistryDataSet	66
8.2	Hooks	67
8.2.1	MlflowHook	67
8.3	Pipelines	67
8.3.1	PipelineML and pipeline_ml_factory	67
8.4	Cli commands	69
8.4.1	init	69
8.4.2	ui	69
8.4.3	modelify	69
8.5	Configuration	70
9	kedro_mlflow package	71
9.1	Datasets	71
9.1.1	Artifact DataSet	71
9.1.2	Metrics DataSet	71
9.1.3	Models DataSet	72
9.2	CLI	77
9.2.1	init	77
9.2.2	ui	77
9.2.3	modelify	78
9.3	Pipelines	79
9.4	Custom Mlflow Models	84
9.5	Configuration	86
9.6	Notebook	93
9.7	Hooks	93
9.7.1	Node Hook	93
9.7.2	Pipeline Hook	93

10	Indices and tables	95
-----------	---------------------------	-----------

Python Module Index	97
Index	99

INTRODUCTION

1.1 Introduction

1.1.1 What is Kedro?

Kedro is a python package which facilitates the prototyping of data pipelines. It aims at enforcing software engineering best practices (separation between I/O and compute, abstraction, templating...). It is specifically useful for machine learning projects since it provides within the same interface interactive objects for the exploration phase, and *Command Line Interface* (CLI) and configuration files for the production phase. This makes the transition from exploration to production as smooth as possible.

For more details, see [Kedro's official documentation](#).

1.1.2 What is Mlflow?

Mlflow is a library which manages the lifecycle of machine learning models. Mlflow provides 4 modules:

- **Mlflow Tracking**: This module focuses on experiment versioning. Its goal is to store all the objects needed to reproduce any code execution. This includes code through version control, but also parameters and artifacts (i.e objects fitted on data like encoders, binarizers...). These elements vary wildly during machine learning experimentation phase. Mlflow also enable to track metrics to evaluate runs, and provides a *User Interface* (UI) to browse the different runs and compare them.
- **Mlflow Projects**: This module provides a configuration files and CLI to enable reproducible execution of pipelines in production phase.
- **Mlflow Models**: This module defines a standard way for packaging machine learning models, and provides built-in ways to serve registered models. Such standardization enable to serve these models across a wide range of tools.
- **Mlflow Model Registry**: This module aims at monitoring deployed models. The registry manages the transition between different versions of the same model (when the dataset is retrained on new data, or when parameters are updated) while it is in production.

For more details, see [Mlflow's official documentation](#).

1.1.3 A brief comparison between Kedro and Mlflow

While Kedro and Mlflow do not compete in the same field, they provide some overlapping functionalities. Mlflow is specifically dedicated to machine learning and its lifecycle management, while Kedro focusing on data pipeline development. Below chart compare the different functionalities:

We discuss hereafter how the two libraries compete on the different functionalities and eventually complete each others.

1.1.3.1 Configuration and prototyping: Kedro 1 - 0 Mlflow

Mlflow and Kedro are essentially overlapping on the way they offer a dedicated configuration files for running the pipeline from CLI. However:

- Mlflow provides a single configuration file (the `MLProject`) where all elements are declared (data, parameters and pipelines). Its goal is mainly to enable CLI execution of the project, but it is not very flexible. In my opinion, this file is **production oriented** and is not really intended to use for exploration.
- Kedro offers a bunch of files (`catalog.yml`, `parameters.yml`, `pipeline.py`) and their associated abstraction (`AbstractDataset`, `DataCatalog`, `Pipeline` and `node` objects). Kedro is much more opinionated: each object has a dedicated place (and only one!) in the template. This makes the framework both **exploration and production oriented**. The downside is that it could make the learning curve a bit sharper since a newcomer has to learn all Kedro specifications. It also provides a `kedro-viz` plugin to visualize the DAG interactively, which is particularly handy in medium-to-big projects.

Kedro is a clear winner here, since it provides more fonctionnalités than Mlflow. It handles very well by design the exploration phase of data science projects when Mlflow is less flexible.

1.1.3.2 Versioning: Kedro 1 - 1 Mlflow

** This section will be updated soon with the brand new experiment tracking functionality of kedro**

The Kedro Journal aimed at reproducibility (it was removed in `kedro==0.18`), but is not focused on machine learning. The Journal keeps track of two elements:

- the CLI arguments, including *on the fly* parameters. This makes the command used to run the pipeline fully reproducible.
- the `AbstractVersionedDataset` for which versioning is activated. It consists in copying the data whom `versioned` argument is `True` when the `save` method of the `AbstractVersionedDataset` is called. This approach suffers from two main drawbacks:
 - the configuration is assumed immutable (including parameters), which is not realistic in machine learning projects where they are very volatile. To fix this, the `git sha` has been recently added to the Journal, but it has still some bugs in my experience (including the fact that the current `git sha` is logged even if the pipeline is ran with uncommitted change, which prevents reproducibility). This is still recent and will likely evolve in the future.
 - there is no support for browsing old runs, which prevents [cleaning the database with old and unused datasets](#), compare runs between each other...

On the other hand, Mlflow:

- distinguishes between artifacts (i.e. any data file), metrics (integers that may evolve over time) and parameters. The logging is very straightforward since there is a one-liner function for logging the desired type. This separation makes further manipulation easier.
- offers a way to configure the logging in a database through the `mlflow_tracking_uri` parameter. This database-like logging comes with easy [querying of different runs through a client](#) (for instance “find the most recent run with a metric at least above a given threshold” is immediate with Mlflow but hacky in Kedro).

- comes with a *User Interface (UI)* which enable to browse / filter / sort the runs, display graphs of the metrics, render plots... This make the run management much easier than in Kedro.
- has a command to reproduce exactly the run from a given `git sha`, which is not possible in Kedro.

MLflow is a clear winner here, because *UI* and *run querying* are must-have for machine learning projects. It is more mature than Kedro for versioning and more focused on machine learning.

1.1.3.3 Model packaging and service: Kedro 1 - 2 Mlflow

Kedro offers a way to package the code to make the pipelines callable, but does not manage specifically machine learning models.

MLflow offers a way to store machine learning models with a given “flavor”, which is the minimal amount of information necessary to use the model for prediction:

- a configuration file
- all the artifacts, i.e. the necessary data for the model to run (including encoder, binarizer...)
- a loader
- a conda configuration through an `environment.yml` file

When a stored model meets these requirements, MLflow provides built-in tools to serve the model (as an API or for batch prediction) on many machine learning tools (Microsoft Azure ML, Amazon Sagemaker, Apache SparkUDF) and locally.

MLflow is currently the only tool which addresses model serving. This is currently not the top priority for Kedro, but may come in the future (through Kedro Server maybe?)

1.1.3.4 Conclusion: Use Kedro and add Mlflow for machine learning projects

In my opinion, Kedro’s will to enforce software engineering best practice makes it really useful for machine learning teams. It is extremely well documented and the support is excellent, which makes it very user friendly even for people with no computer science background. However, it lacks some machine learning-specific functionalities (better versioning, model service), and it is where MLflow fills the gap.

1.2 Motivation

1.2.1 When should I use kedro-mlflow?

Basically, you should use `kedro-mlflow` in **any Kedro project which involves machine learning / deep learning**. As stated in the *introduction*, Kedro’s current versioning (as of version 0.16.6) is not sufficient for machine learning projects: it lacks a UI and a run management system. Besides, the `KedroPipelineModel` ability to serve a kedro pipeline as an API or a batch in one line of code is a great addition for collaboration and transition to production.

If you do not use Kedro or if you do pure data processing which do not involve *machine learning*, this plugin is not what you are seeking for ;)

1.2.2 Why should I use kedro-mlflow?

1.2.2.1 Benchmark of existing solutions

This paragraph gives a (quick) overview of existing solutions for mlflow integration inside Kedro projects.

Mlflow is very simple to add to any existing code. It is a 2-step process:

- add `log_{XXX}` (either param, artifact, metric or model) functions where they are needed inside the code
- add a `MLProject` at the root of the project to enable CLI execution. This file must contain all the possible execution steps (like the `pipeline.py` / `hooks.py` in a kedro project).

Including mlflow inside a `kedro` project is consequently very easy: the logging functions can be added in the code, and the `MLProject` is very simple and is composed almost only of the `kedro run` command. You can find examples of such implementations:

- the [medium paper](#) by QuantumBlack employees.
- the associated [github repo](#)
- other examples can be found on Github, but AFAIK all of them follow the very same principles.

1.2.2.2 Enforcing Kedro principles

Above implementations have the advantage of being very straightforward and *mlflow compliant*, but they break several Kedro principles:

- the `MLFLOW_TRACKING_URI` which registers the database where runs are logged is declared inside the code instead of a configuration file, which **hinders portability across environments** and makes transition to production more difficult
- the logging of different elements can be put in many places in the Kedro template (in the code of any function involved in a node, in a Hook, in the `ProjectContext`, in a `transformer...`). This is not compliant with the Kedro template where any object has a dedicated location. We want to avoid the logging to occur anywhere because:
 - it is **very error-prone** (one can forget to log one parameter)
 - it is **hard to modify** (if you want to remove / add / modify an mlflow action you have to find it in the code)
 - it **prevents reuse** (re-usable function must not contain mlflow specific code unrelated to their functional specificities, only their execution must be tracked).

`kedro-mlflow` enforces these best practices while implementing a clear interface for each mlflow action in Kedro template. Below chart maps the mlflow action to perform with the Python API provided by `kedro-mlflow` and the location in Kedro template where the action should be performed.

`kedro-mlflow` does not currently provide interface to set tags outside a Kedro Pipeline. Some of above decisions are subject to debate and design decisions (for instance, metrics are often updated in a loop during each epoch / training iteration and it does not always make sense to register the metric between computation steps, e.g. as an I/O operation after a node run).

Note: You do **not** need any `MLProject` file to use mlflow inside your Kedro project. As seen in the [introduction](#), this file overlaps with Kedro configuration files.

INTRODUCTION

2.1 Installation guide

2.1.1 Pre-requisites

2.1.1.1 Create a virtual environment

I strongly recommend to use conda (a package manager) to create an environment in order to avoid version conflicts between packages.

I also recommend to read [Kedro installation guide](#) to set up your Kedro project.

```
conda create -n <your-environment-name> python=<3.[6-8].X>
```

For the rest of the section, we assume the environment is activated:

```
conda activate <your-environment-name>
```

2.1.1.2 Check your kedro version

If you have an existing environment with kedro already installed, make sure its version is above 0.16.0. `kedro-mlflow` cannot be used with `kedro<0.16.0`, and if you install it in an existing environment, it will reinstall a more up-to-date version of kedro and likely mess your project up until you reinstall the proper version of kedro (the one you originally created the project with).

```
pip show kedro
```

should return:

```
Name: kedro
Version: <your-kedro-version> # <-- make sure it is above 0.16.0, <0.17.0
Summary: Kedro helps you build production-ready data and analytics pipelines
Home-page: https://github.com/quantumblacklabs/kedro
Author: QuantumBlack Labs
Author-email: None
License: Apache Software License (Apache 2.0)
Location: <...>\anaconda3\envs\<your-environment-name>\lib\site-packages
Requires: pip-tools, cachetools, fsspec, toposort, anyconfig, PyYAML, click, pluggy, ↵
↵ jmespath, python-json-logger, jupyter-client, setuptools, cookiecutter
```

2.1.2 Install the plugin

The current version of the plugin is compatible with `kedro>=0.16.0`. Since Kedro tries to enforce backward compatibility, it will very likely remain compatible with further versions.

2.1.2.1 Install from PyPI

You can install `kedro-mlflow` plugin from PyPi with `pip`:

```
pip install --upgrade kedro-mlflow
```

2.1.2.2 Install from sources

You may want to install the master branch which has unreleased features:

```
pip install git+https://github.com/Galileo-Galilei/kedro-mlflow.git
```

2.1.3 Check the installation

Type `kedro info` in a terminal to check the installation. If it has succeeded, you should see the following ascii art:

```
| | _____ _| | _ _ _ _  
| | / / _ \ _| | ' _ / _ \  
| | < _ / ( _| | | | ( _ ) |  
|_| \| _ \ _ \| _ , _| | _ \ _ /  
v0.16.<x>
```

kedro allows teams to create analytics projects. It is developed as part of the Kedro initiative at QuantumBlack.

Installed plugins:

kedro_mlflow: 0.12.2 (hooks:global,project)

The version 0.12.2 of the plugin is installed and has both global and project commands.

That's it! You are now ready to go!

2.1.4 Available commands

With the `kedro mlflow -h` command outside of a kedro project, you now see the following output:

```
Usage: kedro mlflow [OPTIONS] COMMAND [ARGS]...

  Use mlflow-specific commands inside kedro project.

Options:
  -h, --help  Show this message and exit.
```

(continues on next page)

(continued from previous page)

Commands:

```
new Create a new kedro project with updated template.
```

Note: For now, the `kedro mlflow new` command is not implemented. You must use `kedro new` to create a project, and then call `kedro mlflow init` inside this new project.

2.2 Initialize your Kedro project

This section assume that *you have installed `kedro-mlflow` in your virtual environment*.

2.2.1 Create a kedro project

This plugin must be used in an existing kedro project. If you do not have a kedro project yet, you can create it with `kedro new` command. [See the kedro docs for a tutorial](#).

If you do not have a real-world project, you can use a kedro example and *follow the “Getting started” example* to make a demo of this plugin out of the box.

2.2.2 Activate kedro-mlflow in your kedro project

In order to use the `kedro-mlflow` plugin, you need to setup its configuration and declare its hooks. Those 2 actions are detailed in the following paragraphs.

2.2.2.1 Setting up the kedro-mlflow configuration file

`kedro-mlflow` is *configured* through an `mlflow.yml` file. The recommended way to initialize the `mlflow.yml` is by using *the `kedro-mlflow CLI`*, but you can create it manually.

Note: Since `kedro-mlflow` $\geq 0.11.2$, the configuration file is optional. However, the plugin will use default `mlflow` configuration. Specifically, the runs will be stored in a `mlruns` folder at the root fo the kedro project since no `mlflow_tracking_uri` is configured.

Set the working directory at the root of your kedro project:

```
cd path/to/your/project
```

Run the init command :

```
kedro mlflow init
```

you should see the following message:

```
'conf/local/mlflow.yml' successfully updated.
```

Note: you can create the configuration file in another kedro environment with the `--env` argument:

```
kedro mlflow init --env=<other-environment>
```

2.2.2.2 Declaring kedro-mlflow hooks

kedro_mlflow hooks implementations must be registered with Kedro. There are 2 ways of registering [hooks](#).

Note that you must register the hook provided by kedro-mlflow (MlflowHook) to make the plugin work.

2.2.2.2.1 Declaring hooks through auto-discovery (for kedro>=0.16.4) [Default behaviour]

If you use kedro>=0.16.4, kedro-mlflow hooks are auto-registered automatically by default without any action from your side. You can [disable this behaviour](#) in your settings.py file.

2.2.2.2.2 Declaring hooks statically in settings.py

If you have turned off plugin automatic registration, you can register its hooks manually by [adding them to settings.py](#):

```
# <your_project>/src/<your_project>/settings.py
from kedro_mlflow.framework.hooks import MlflowHook

HOOKS = (MlflowHook(),)
```

2.3 Migration guide

This page explains how to migrate an existing kedro project to a more up to date kedro-mlflow versions with breaking changes.

2.3.1 Migration from 0.10.x to 0.11.x

1. If you are registering your kedro_mlflow hooks manually (instead of using automatic registering from plugin, which is the default), change your settings.py

from this

```
# <your_project>/src/<your_project>/settings.py
from kedro_mlflow.framework.hooks import MlflowHook

HOOKS = (MlflowPipelineHook(), MlflowNodeHook)
```

to this:

```
# <your_project>/src/<your_project>/settings.py
from kedro_mlflow.framework.hooks import MlflowHook

HOOKS = (MlflowHook(),)
```

2. The get_mlflow_config public method has been removed and the mlflow configuration is now automatically stored in the mlflow attribute of KedroContext. if you need to access the mlflow configuration, you can use:

```

from kedro.framework.session import KedroSession
from kedro.framework.startup import bootstrap_project

bootstrap_project(project_path)
with KedroSession.create(
    project_path=project_path,
) as session:
    context = session.load_context()
    print(context.mlflow) # this is where mlflow configuration is stored

```

3. Remove the `server.stores_environment_variables` key from `mlflow.yml`. This is a dead key which was unused. It will now throw an error if it is still written in `mlflow.yml`.

2.3.2 Migration from 0.9.x to 0.10.x

You must upgrade your kedro version to `kedro==0.18.1` to use `kedro_mlflow>=0.10`.

2.3.3 Migration from 0.8.x to 0.9.x

There are no breaking change in this patch release except if you retrieve the mlflow configuration manually (e.g. in a script or a jupyter notebook). The `setup()` method needs to be called with context:

```

from kedro.framework.context import load_context
from kedro_mlflow.config import get_mlflow_config

context = load_context(".")

# the new best practice is just to remove these lines
mlflow_config = get_mlflow_config(context) # pass context instead of session
mlflow_config.setup(context) # pass context instead of session

```

This is not necessary: the mlflow config is automatically set up when the context is loaded, so unless you need to access the config manually you can get rid of these 2 lines

2.3.4 Migration from 0.7.x to 0.8.x

- Update the `mlflow.yml` configuration file with `kedro mlflow init --force` command
- `pipeline_ml_factory(pipeline_ml=<your-pipeline-ml>, ...)` (resp. `KedroPipelineModel(pipeline_ml=<your-pipeline-ml>, ...)`) first argument is renamed pipeline. Change the call to `pipeline_ml_factory(pipeline=<your-pipeline-ml>)` (resp. `KedroPipelineModel(pipeline=<your-pipeline-ml>, ...)`).
- Change the call from `pipeline_ml_factory(..., model_signature=<model-signature>, conda_env=<conda-env>, model_name=<model_name>)` to `pipeline_ml_factory(..., log_model_kwargs=dict(signature=, conda_env=, artifact_path=<model_name>))`. Notice that the arguments are renamed to match mlflow's and they are passed as a dict in `log_model_kwargs``.

2.3.5 Migration from 0.6.x to 0.7.x

If you are working with `kedro==0.17.0`, update your template to `kedro>=0.17.1`.

2.3.6 Migration from 0.5.x to 0.6.x

`kedro==0.16.x` is no longer supported. You need to update your project template to `kedro==0.17.0` template.

2.3.7 Migration from 0.4.x to 0.5.x

The only breaking change with the previous release is the format of `KedroPipelineMLModel` class. Hence, if you saved a pipeline as a `Mlflow Model` with `pipeline_ml_factory` in `kedro-mlflow==0.4.x`, loading it (either with `MlflowModelTrackingDataset` or `mlflow.pyfunc.load_model`) with `kedro-mlflow==0.5.0` installed will raise an error. You will need either to retrain the model or to load it with `kedro-mlflow==0.4.x`.

2.3.8 Migration from 0.4.0 to 0.4.1

There are no breaking change in this patch release except if you retrieve the `mlflow` configuration manually (e.g. in a script or a jupyter notebook). You must add an extra call to the `setup()` method:

```
from kedro.framework.context import load_context
from kedro_mlflow.config import get_mlflow_config

context = load_context(".")
mlflow_config = get_mlflow_config(context)
mlflow_config.setup()  # <-- add this line which did not exists in 0.4.0
```

2.3.9 Migration from 0.3.x to 0.4.x

2.3.9.1 Catalog entries

Replace the following entries:

2.3.9.2 Hooks

Hooks are now auto-registered if you use `kedro>=0.16.4`. You can remove the following entry from your `run.py`:

```
hooks = (MlflowPipelineHook(), MlflowNodeHook())
```

2.3.9.3 KedroPipelineModel

Be aware that if you have saved a pipeline as a mlflow model with `pipeline_ml_factory`, retraining this pipeline with `kedro-mlflow==0.4.0` will lead to a new behaviour. Let assume the name of your output in the DataCatalog was `predictions`, the output of a registered model will be modified from:

```
{
  predictions:
    {
      <your model-predictions>
    }
}
```

to:

```
{
  <your model-predictions>
}
```

Thus, parsing the predictions of this model must be updated accordingly.

INTRODUCTION

3.1 Goal of the tutorial

This “Getting started” section demonstrates how to use some basic functionalities of `kedro-mlflow` in an end to end example. It is supposed to be simple and self-contained and is partially redundant with other sections, but far from complete.

The section only focuses on the versioning part and does not show the “machine learning framework” abilities of the plugin. The goal is to give to a new user a quick glance to some capabilities so that he can decide whether the plugin suits its needs or not. It is totally worth checking the other sections to have a much more complete overview of what this plugin provides.

3.2 Example project

3.2.1 Install the plugin in a virtual environment

Create a conda environment and install `kedro-mlflow` (this will automatically install `kedro>=0.16.0`).

```
conda create -n km_example python=3.9 --yes
conda activate km_example
pip install kedro-mlflow==0.12.2
```

3.2.2 Install the toy project

For this end to end example, we will use the `kedro starter` with the `iris dataset`.

We use this project because:

- it covers most of the common use cases
- it is compatible with older version of `Kedro` so newcomers are used to it
- it is maintained by `Kedro` maintainers and therefore enforces some best practices.

3.2.2.1 Installation with kedro>=0.19.0

Warning: For kedro>=0.19.0, pandas-iris starter has been removed. It is recommended to install `spaceflights-pandas` starter instead.

3.2.2.2 Installation with kedro>=0.16.3

The default starter is now called “pandas-iris”. In a new console, enter:

```
kedro new --starter=pandas-iris
```

Answer Kedro Mlflow Example, km-example and km_example to the three setup questions of a new kedro project:

```
Project Name:
=====
Please enter a human readable name for your new project.
Spaces and punctuation are allowed.
[New Kedro Project]: Kedro Mlflow Example

Repository Name:
=====
Please enter a directory name for your new project repository.
Alphanumeric characters, hyphens and underscores are allowed.
Lowercase is recommended.
[kedro-mlflow-example]: km-example

Python Package Name:
=====
Please enter a valid Python package name for your project package.
Alphanumeric characters and underscores are allowed.
Lowercase is recommended. Package name must start with a letter or underscore.
[kedro_mlflow_example]: km_example
```

3.2.2.3 Installation with kedro>=0.16.0, <=0.16.2

With older versions of Kedro, the starter option is not available, but this `kedro new` provides an “Include example” question. Answer y to this question to get the same starter as above. In a new console, enter:

```
kedro new
```

Answer Kedro Mlflow Example, km-example, km_example and y to the four setup questions of a new kedro project:

```
Project Name:
=====
Please enter a human readable name for your new project.
Spaces and punctuation are allowed.
[New Kedro Project]: Kedro Mlflow Example

Repository Name:
=====
Please enter a directory name for your new project repository.
```

(continues on next page)

(continued from previous page)

```

Alphanumeric characters, hyphens and underscores are allowed.
Lowercase is recommended.
[kedro-mlflow-example]: km-example

Python Package Name:
=====
Please enter a valid Python package name for your project package.
Alphanumeric characters and underscores are allowed.
Lowercase is recommended. Package name must start with a letter or underscore.
[kedro_mlflow_example]: km_example

Generate Example Pipeline:
=====
Do you want to generate an example pipeline in your project?
Good for first-time users. (default=N)
[y/N]: y

```

3.2.3 Install dependencies

Move to the project directory:

```
cd km-example
```

Install the project dependencies (**Warning: Do not use `kedro install` commands does not install the packages in your activated environment**):

```
pip install -r src/requirements.txt
```

3.3 First steps with the plugin

3.3.1 Initialize kedro-mlflow


First, you need to initialize your project and add the plugin-specific configuration file with this command:

```
kedro mlflow init
```

You will see the following message:

```
'conf/local/mlflow.yml' successfully updated.
```

The `conf/local` folder is updated and you can see the `mlflow.yml` file:

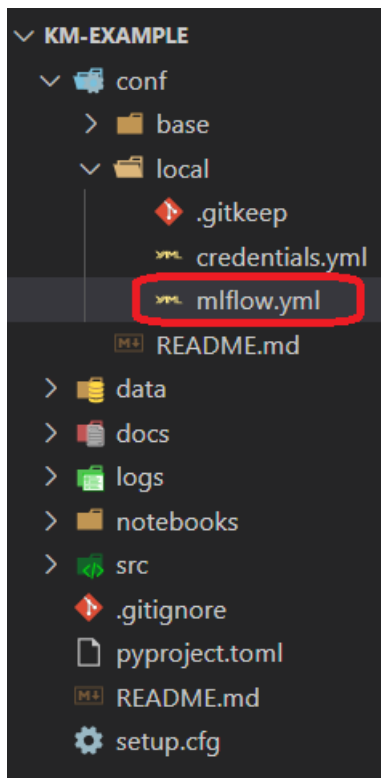

Optional: If you have configured your own mlflow server, you can specify the tracking uri in the `mlflow.yml` (replace the highlighted line below):

```

mlflow.yml X
conf > base > mlflow.yml
1  # GLOBAL CONFIGURATION -----
2
3  # `mlflow_tracking_uri` is the path where the runs will be recorded.
4  # For more informations, see https://www.mlflow.org/docs/latest/tracking.html#where-runs-are-recorded
5  # kedro-mlflow accepts relative path from the project root.
6  # For instance, default `mlruns` will create a `mlruns` folder
7  # at the root of the project
8  mlflow_tracking_uri: mlruns
9
10
11 # EXPERIMENT-RELATED PARAMETERS -----
12
13 # `name` is the name of the experiment (~subfolder
14 # where the runs are recorded). Change the name to
15 # switch between different experiments
16 experiment:
17   name: km_example
18   create: True # if the specified `name` does not exists, should it be created?
19
20
21 # RUN-RELATED PARAMETERS -----
22
23 run:
24   id: null # if `id` is None, a new run will be created
25   name: null # if `name` is None, pipeline name will be used for the run name
26   nested: True # if `nested` is False, you won't be able to launch sub-runs inside your nodes
27
28 # UI-RELATED PARAMETERS -----
29
30 ui:
31   port: null # the port to use for the ui. Find a free port if null.
32   host: null # the host to use for the ui. Default to "localhost" if null.
33

```

3.3.2 Run the pipeline

Open a new command and launch

```
kedro run
```

If the pipeline executes properly, you should see the following log:

```

2020-07-13 21:29:25,401 - kedro.io.data_catalog - INFO - Loading data from `example_iris_
↳data` (CSVDataset)...
2020-07-13 21:29:25,562 - kedro.io.data_catalog - INFO - Loading data from
↳`params:example_test_data_ratio` (MemoryDataset)...
2020-07-13 21:29:25,969 - kedro.pipeline.node - INFO - Running node: split_data([example_
↳iris_data,params:example_test_data_ratio]) -> [example_test_x,example_test_y,example_
↳train_x,example_train_y]
2020-07-13 21:29:26,053 - kedro.io.data_catalog - INFO - Saving data to `example_train_
↳x` (MemoryDataset)...
2020-07-13 21:29:26,368 - kedro.io.data_catalog - INFO - Saving data to `example_train_
↳y` (MemoryDataset)...
2020-07-13 21:29:26,484 - kedro.io.data_catalog - INFO - Saving data to `example_test_x`
↳ (MemoryDataset)...

```

(continues on next page)


(continued from previous page)

```

2020-07-13 21:29:26,486 - kedro.io.data_catalog - INFO - Saving data to `example_test_y`
↳(MemoryDataset)...
2020-07-13 21:29:26,610 - kedro.runner.sequential_runner - INFO - Completed 1 out of 4
↳tasks
2020-07-13 21:29:26,850 - kedro.io.data_catalog - INFO - Loading data from `example_
↳train_x` (MemoryDataset)...
2020-07-13 21:29:26,851 - kedro.io.data_catalog - INFO - Loading data from `example_
↳train_y` (MemoryDataset)...
2020-07-13 21:29:26,965 - kedro.io.data_catalog - INFO - Loading data from `parameters`
↳(MemoryDataset)...
2020-07-13 21:29:26,972 - kedro.pipeline.node - INFO - Running node: train_
↳model([example_train_x,example_train_y,parameters]) -> [example_model]
2020-07-13 21:29:27,756 - kedro.io.data_catalog - INFO - Saving data to `example_model`
↳(MemoryDataset)...
2020-07-13 21:29:27,763 - kedro.runner.sequential_runner - INFO - Completed 2 out of 4
↳tasks
2020-07-13 21:29:28,141 - kedro.io.data_catalog - INFO - Loading data from `example_
↳model` (MemoryDataset)...
2020-07-13 21:29:28,161 - kedro.io.data_catalog - INFO - Loading data from `example_test_
↳x` (MemoryDataset)...
2020-07-13 21:29:28,670 - kedro.pipeline.node - INFO - Running node: predict([example_
↳model,example_test_x]) -> [example_predictions]
2020-07-13 21:29:29,002 - kedro.io.data_catalog - INFO - Saving data to `example_
↳predictions` (MemoryDataset)...
2020-07-13 21:29:29,248 - kedro.runner.sequential_runner - INFO - Completed 3 out of 4
↳tasks
2020-07-13 21:29:29,433 - kedro.io.data_catalog - INFO - Loading data from `example_
↳predictions` (MemoryDataset)...
2020-07-13 21:29:29,730 - kedro.io.data_catalog - INFO - Loading data from `example_test_
↳y` (MemoryDataset)...
2020-07-13 21:29:29,911 - kedro.pipeline.node - INFO - Running node: report_
↳accuracy([example_predictions,example_test_y]) -> None
2020-07-13 21:29:30,056 - km_example.pipelines.data_science.nodes - INFO - Model
↳accuracy on test set: 100.00%
2020-07-13 21:29:30,214 - kedro.runner.sequential_runner - INFO - Completed 4 out of 4
↳tasks
2020-07-13 21:29:30,372 - kedro.runner.sequential_runner - INFO - Pipeline execution
↳completed successfully.

```

Since we have kept the default value of the `mlflow.yml`, the tracking uri (the place where runs are recorded) is a local `mlruns` folder which has just been created with the execution:

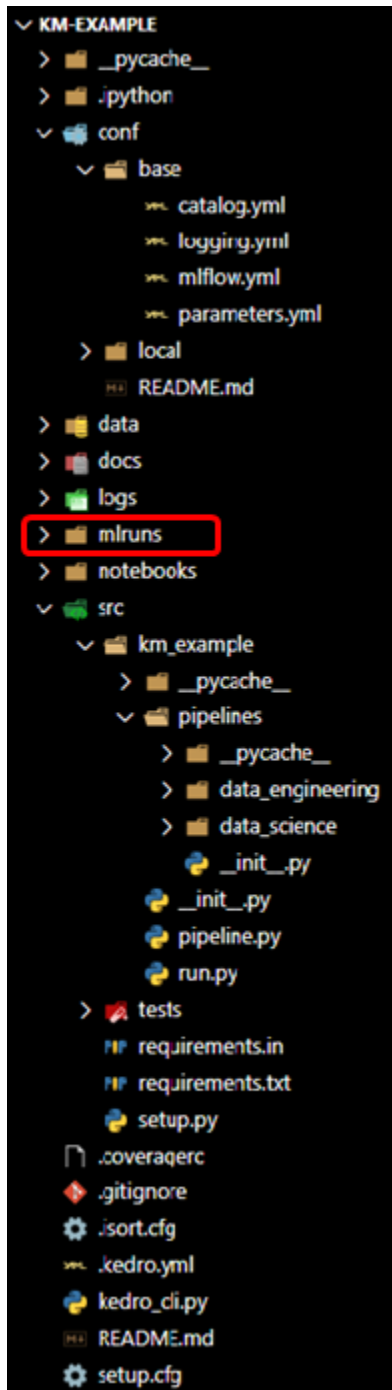

3.3.3 Open the UI

Launch the ui:

```
kedro mlflow ui
```

And open the following adress in your favorite browser

<http://localhost:5000/>

The screenshot shows the mlflow Experiments UI. On the left, the 'Experiments' sidebar lists 'km_example' as the selected experiment. A red box highlights this entry with the text: "The name of the experiment in 'mlflow.yml'". The main panel shows the 'km_example' experiment details, including the Experiment ID (1) and the Artifact Location (file:///C:/Local/path/to/...). Below this, the 'Search Runs' section shows a search query: "metrics.rmse < 1 and params.model = 'tree' and tags.mlflow.source.type = 'LOCAL'". The 'Showing 1 matching run' section displays a table with one run. A red box highlights the 'Start Time' column for this run, with the text: "Last run executed".

	Start Time	Run Name	User	Source	Version	Parameters	Tags
<input type="checkbox"/>	2020-07-13 21:29:24	-	You	Python path	0.2	example_test_data_rat parameters	env extra_params from_inputs

Click now on the last run executed, you will land on this page:

km_example > Run 9128c4c15e2c438db27749561f543c97 ▾

Date: 2020-07-13 21:29:24

Source: 

\\km_example\Scripts\kedro

Duration: 5.6s

Status: FINISHED

▼ Notes [🔗](#)

None

▼ Parameters

Name	Value
example_test_data_ratio	0.2
parameters	{'example_test_data_ratio': 0.2, 'example_num_train_iter': 10000, 'example_learning_rate': 0.01}

▼ Metrics

Name	Value
------	-------

▼ Tags

Name	Value	Actions
env	local	🔗 🗑️
extra_params	{}	🔗 🗑️
from_inputs	[]	🔗 🗑️
from_nodes	[]	🔗 🗑️
git_sha	None	🔗 🗑️
kedro_command	kedro run	🔗 🗑️
kedro_version	0.16.3	🔗 🗑️
load_versions	{}	🔗 🗑️
node_names	()	🔗 🗑️
pipeline_name	None	🔗 🗑️
project_path	\\km-example	🔗 🗑️
run_id	2020-07-13T19:29:20.514Z	🔗 🗑️
tags	()	🔗 🗑️
to_nodes	[]	🔗 🗑️

Add Tag

<input type="text" value="Name"/>	<input type="text" value="Value"/>	<input type="button" value="Add"/>
-----------------------------------	------------------------------------	------------------------------------

▼ Artifacts

No Artifacts Recorded

Use the log artifact APIs to store file outputs from MLflow runs.

3.3.3.1 Parameters versioning

Note that the parameters have been recorded *automagically*. Here, two parameters format are used:


1. The parameter `example_test_data_ratio`, which is called in the `pipeline.py` file with the `params:` prefix
2. the dictionary of all parameters in `parameters.yml` which is a reserved key word in Kedro. Note that **this is bad practice** because you cannot know which parameters are really used inside the function called. Another problem is that it can generate too long parameters names and lead to mlflow errors.

You can see that these are effectively the registered parameters in the pipeline with the `kedro-viz` plugin:

```
pip install kedro-viz
kedro viz
```

Open your browser at the following adress:

You should see the following graph:

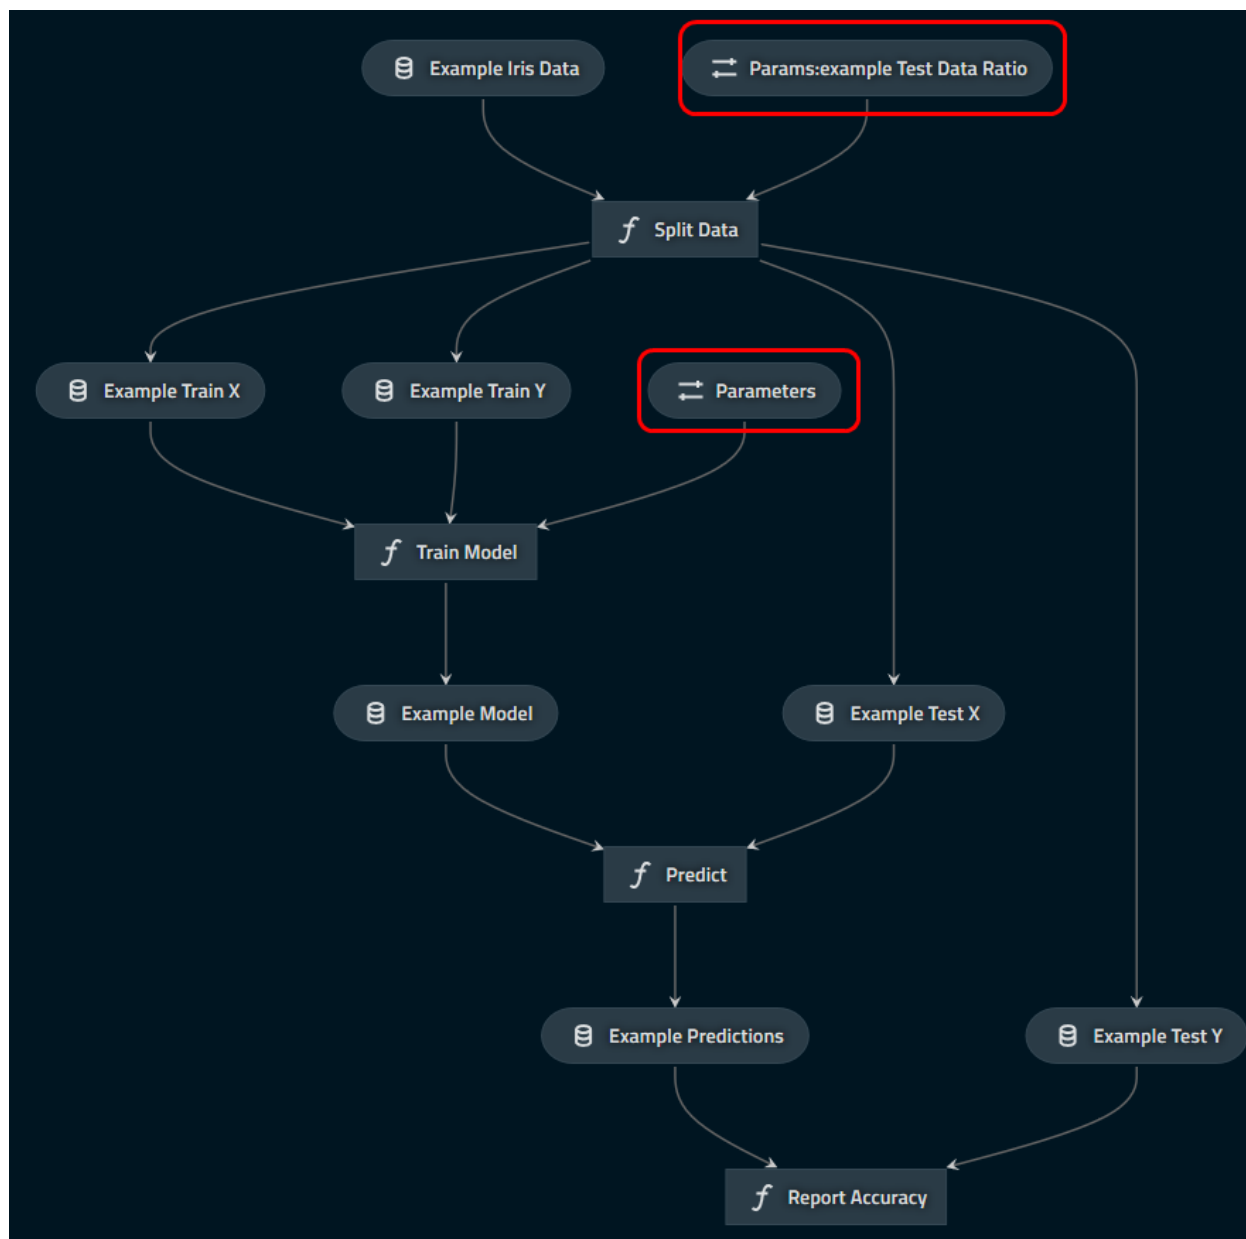

which indicates clearly which parameters are logged (in the red boxes with the “parameter” icon).

3.3.3.2 Journal information

The informations provided by the Kedro's Journal are also recorded as tags in the mlflow ui in order to make reproducible. In particular, the exact command used for running the pipeline and the kedro version used are stored.

3.3.3.3 Artifacts

With this run, artifacts are empty. This is expected: mlflow does not know what it should log and it will not log all your data by default. However, you want to save your model (at least) or your run is likely useless!

First, open the `catalog.yml` file which should look like this:

```
# This is a data set used by the "Hello World" example pipeline provided with the project
# template. Please feel free to remove it once you remove the example pipeline.

example_iris_data:
  type: pandas.CSVDataset
  filepath: data/01_raw/iris.csv
```

And persist the model as a pickle with the `MlflowArtifactDataset` class:

```
# This is a data set used by the "Hello World" example pipeline provided with the project
# template. Please feel free to remove it once you remove the example pipeline.

example_iris_data:
  type: pandas.CSVDataset
  filepath: data/01_raw/iris.csv

example_model:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: pickle.PickleDataset
    filepath: data/06_models/trained_model.pkl
```

Rerun the pipeline (with `kedro run`), and reopen the UI. Select the last run and see that the file was uploaded:

▼ Artifacts



This works for any type of file (including images with `MatplotlibWriter`) and the UI even offers a preview for `png` and `csv`, which is really convenient to compare runs.

Note: MLflow offers specific logging for machine learning models that may be better suited for your use case, see `MlflowModelTrackingDataset`

3.3.4 Going further

Above vanilla example is just the beginning of your experience with `kedro-mlflow`. Check out the next sections to see how `kedro-mlflow`:

- offers advanced capabilities for machine learning versioning
- can help to create standardize pipelines for deployment in production


INTRODUCTION

4.1 Configure mlflow inside your project

We assume in this section that you have *installed kedro-mlflow in your virtual environment* and you have *configured your project* with a `mlflow.yml` configuration file and hooks declaration.

4.1.1 Context: mlflow tracking under the hood

Mlflow is composed of four modules which are described in the *introduction section*. The main module is “tracking”. The goal of this module is to keep track of every varying parameters across different code execution (parameters, metrics and artifacts). The following schema describes how this modules operates under the hood:

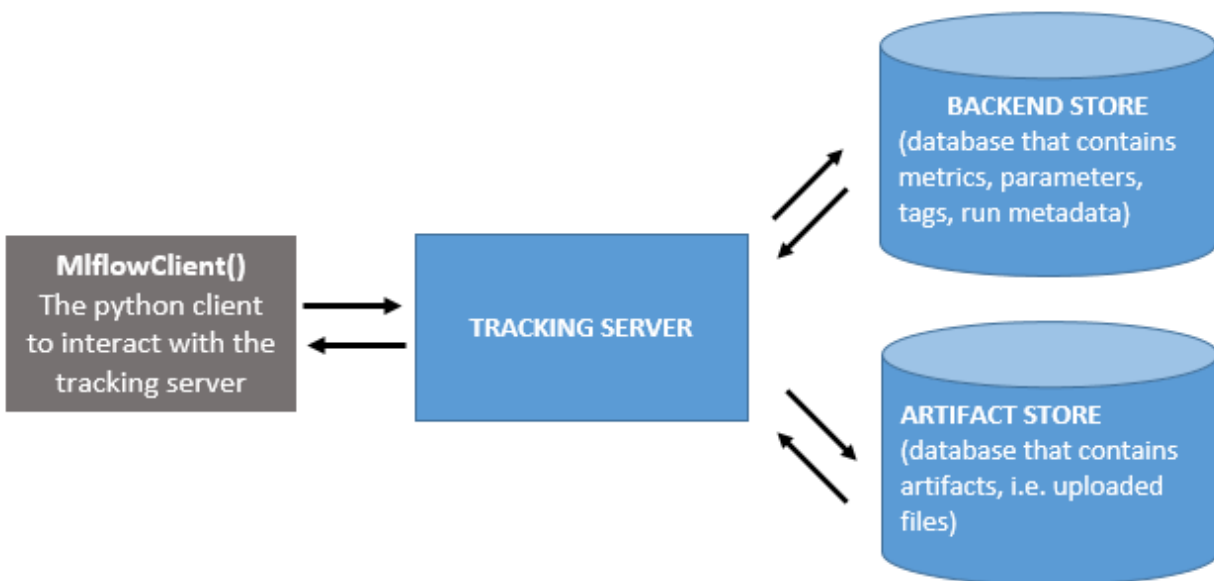

Basically, this schema shows that mlflow separates WHERE the artifacts are logged from HOW they are logged inside your code. You need to setup your mlflow tracking server separately from your code, and then each logging will send a request to the tracking server to store the elements you want to track in the appropriate location. The advantage of such a setup are numerous:

- once the mlflow tracking server is setup, there is single parameter to set before logging which is the tracking server uri. This makes configuration very easy in your project.
- since the different storage locations are well identified, it is easy to define custom solutions for each of them. They can be [database](#) or [even local folders](#).

The rationale behind the separation of the backend store and the artifacts store is that artifacts can be very big and are duplicated across runs, so they need a special management with extensible storage. This is typically [cloud storage like AWS S3 or Azure Blob storage](#).

4.1.2 The `mlflow.yml` file

The `mlflow.yml` file contains all configuration you can pass either to kedro or mlflow through the plugin. Note that you can duplicate `mlflow.yml` file in as many environments (i.e. `conf/` folders) as you need. To create a `mlflow.yml` file in a kedro configuration environment, use `kedro mlflow init --env=<your-env>`.

Note: If no `mlflow.yml` file is found in the environment, `kedro-mlflow` will still work and use all `mlflow.yml` default values as configuration.

Important: If the kedro run is started in a process where a mlflow run is already active, `kedro-mlflow` will ignore all the configuration in `mlflow.yml` and use the active run. The mlflow run will NOT be closed at the end of the kedro run. This enable using `kedro-mlflow` with an orchestrator (e.g airflow, AzureML...) which starts the mlflow run and configuraiton itself.

4.1.2.1 Configure the tracking server

4.1.2.1.1 Configure the tracking and registry uri

`kedro-mlflow` needs the tracking uri of your mlflow tracking server to operate properly. The `mlflow.yml` file must have the `mlflow_tracking_uri` key with a [valid mlflow_tracking_uri associated](#) value. The `mlflow.yml` default have this keys set to `null`. This means that it will look for a `MLFLOW_TRACKING_URI` environment variable, and if it is not set, it will create a `mlruns` folder locally at the root of your kedro project. This enables you to use the plugin without any setup of a mlflow tracking server.

Unlike mlflow, `kedro-mlflow` allows the `mlflow_tracking_uri` to be a relative path. It will convert it to an absolute uri automatically.

```
server:
  mlflow_tracking_uri: mlruns
```

This is the **only mandatory key in the `mlflow.yml` file**, but there are many others described hereafter that provide fine-grained control on your mlflow setup.

You can also specify the registry uri:

```
server:
  mlflow_registry_uri: sqlite:///path/to/registry.db
```

Note: Unlike the `mlflow_tracking_uri`, the `mlflow_registry_uri` must be an *absolute* path prefixed with the [database dialect](#) of your database, likely `sqlite:///` for a local database.

4.1.2.1.2 Configure the credentials

4.1.2.1.2.1 Default credentials with environment variables

You can also specify some environment variables needed by mlflow (e.g. `AWS_ACCESS_KEY_ID` and `AWS_SECRET_ACCESS_KEY`) in the credentials and specify them in the `mlflow.yml`. Any key specified will be automatically exported as environment variables.

Your `credentials.yml` will look as follows:

```
my_mlflow_credentials:
  AWS_ACCESS_KEY_ID: <your-key>
  AWS_SECRET_ACCESS_KEY: <your-secret-key>
```

and you can supply the credentials key of the `mlflow.yml`:

```
server:
  credentials: my_mlflow_credentials
```

Note: For security reasons, the credentials will not be accessible within `KedroMlflowConfig` objects. They will be exported as environment variables *on the fly* when running the pipeline.

4.1.2.1.2.2 Authentication with expiring tokens

Mlflow can be deployed with OAuth2.0. authentication method : in this case, secured MLflow instances require HTTP requests to have the `Authorization: Bearer <token>` header. Mlflow exposes a `RequestHeaderProvider` abstract class to manage this use case. If you need kedro-mlflow to use a *custom* header provider, you can configure your `mlflow.yml` as follow:

```
# mlflow.yml
server:
  request_header_provider:
    type: path.to.your.class.CustomRequestHeaderProvider
    pass_context: True # if you want to pass context. it must be named ``kedro_
    ↪context`` in the ``__init__`` method of your custom ``request_header_provider``
    init_kwargs:
      my_kwarg: 1
```

This will automatically register in the mlflow endpoint the `CustomRequestHeaderProvider(kedro_context=<kedro-context>, my_kwarg=1)` request header when running a kedro pipeline.

4.1.2.2 Deactivate tracking under conditions

kedro-mlflow logs every run parameters in mlflow. You may want to avoid tracking some runs (for instance while debugging to avoid polluting your mlflow database, or because some pipelines are not ml related and it does not makes sense to log their parameters).

You can specify the name of the pipelines you want to turn off:

```
tracking:
  disable_tracking:
    pipelines:
      - <pipeline-name>
```

Notice that it will stop autologging parameters but also any `Mlflow<Artifact/Metrics/ModelTracking>Dataset` you may have in these deactivated pipelines.

4.1.2.3 Configure mlflow experiment

Mlflow enable the user to create “experiments” to organize his work. The different experiments will be visible on the left panel of the mlflow user interface. You can create an experiment through the `mlflow.yml` file with the `experiment` key:

```
tracking:
  experiment:
    name: <your-experiment-name> # by default, the name of your python package in your
    ↪ kedro project
    restore_if_deleted: True # if the experiment`name` was previously deleted experiment,
    ↪ should we restore it?
```

Note that by default, mlflow crashes if you try to start a run while you have not created the experiment first. kedro-mlflow has a `create` key (True by default) which forces the creation of the experiment if it does not exist. Set it to False to match mlflow default value.

4.1.2.4 Configure the run

When you launch a new kedro run, kedro-mlflow instantiates an underlying mlflow run through the hooks. By default, we assume the user want to launch each kedro run in separated mlflow run to keep a one to one relationship between kedro runs and mlflow runs. However, one may need to *continue* an existing mlflow run (for instance, because you resume the kedro run from a later starting point of your pipeline).

The `mlflow.yml` accepts the following keys:

```
tracking:
  run:
    id: null # if `id` is None, a new run will be created
    name: null # if `name` is None, pipeline name will be used for the run name
    nested: True ## if `nested` is False, you won't be able to launch sub-runs inside
    ↪ your nodes
```

Tip: If you want to generate a random name for each run (like mlflow’s default), you can use the built-in `km.random_name` resolver:

```
tracking:
  run:
    name: ${km.random_name:} # don't forget the trailing ":" at the end !
```

- If you want to continue to log in an existing mlflow run, write its id in the id key.
- If you want to enable the creation of sub runs inside your nodes (for instance, for model comparison or hyperparameter tuning), set the nested key to True

4.1.2.5 Extra tracking configuration

You may sometimes encounter an mlflow failure “parameters too long”. Mlflow has indeed an upper limit on the length of the parameters you can store in it. This is a very common pattern when you log a full dictionary in mlflow (e.g. the reserved keyword `parameters` in kedro, or a dictionary containing all the hyperparameters you want to tune for a given model). You can configure the kedro-mlflow hooks to overcome this limitation by “flattening” automatically dictionaries in a kedro run.

The `mlflow.yml` accepts the following keys:

```
tracking:
  params:
    dict_params:
      flatten: False # if True, parameter which are dictionary will be splitted in
↳ multiple parameters when logged in mlflow, one for each key.
      recursive: True # Should the dictionary flattening be applied recursively (i.e.
↳ for nested dictionaries)? Not use if `flatten_dict_params` is False.
      sep: "." # In case of recursive flattening, what separator should be used between
↳ the keys? E.g. {hyperaparam1: {p1:1, p2:2}} will be logged as hyperaparam1.p1 and
↳ hyperaparam1.p2 in mlflow.
      long_params_strategy: fail # One of ["fail", "tag", "truncate" ] If a parameter is
↳ above mlflow limit (currently 250), what should kedro-mlflow do? -> fail, set as a tag
↳ instead of a parameter, or truncate it to its 250 first letters?
```

If you set `flatten` to True, each key of the dictionary will be logged as a mlflow parameters, instead of a single parameter for the whole dictionary. Note that it is recommended to facilitate run comparison.

The `long_parameters_strategy` key enable to define different way to handle parameters over the mlflow limit (currently 250 characters):

- `fail`: no special management of characters above the limit. They will be send to mlflow and as a result, in some backend they will be stored normally (e.g. for `FileStore` backend) and for some others logging will fail.
- `truncate`: All parameters above the limit will be automatically truncated to a 250-character length to make sure logging will pass for all mlflow backend.
- `tag`: Any parameter above the limit will be registered as a tag instead of a parameter as it seems to be the recommended mlflow way to deal with long parameters.

4.1.2.6 Configure the user interface

You can configure mlflow user interface default params inside the `mlflow.yml`:

```
ui:
  port: null # the port to use for the ui. Find a free port if null.
  host: null # the host to use for the ui. Default to "localhost" if null.
```

The port and host parameters set in this configuration will be used by default if you use `kedro mlflow ui` command (instead of `mlflow ui`) to open the user interface. Note that the `kedro mlflow ui` command will also use the `mlflow_tracking_uri` key set inside `mlflow.yml`.

4.1.3 Overwrite configuration at runtime

In `kedro>=0.19.0`, it is possible to overwrite configuration at runtime with the `runtime_params` resolver.

Tip: `mlflow.yml` is handled exactly as Kedro native configuration files, so anything which is possible within `catalog.yml` or `parameters.yml` should work within `mlflow.yml`

For instance, assume you want to specify the run name through the CLI, you can configure your `mlflow.yml` as follows:

```
# mlflow.yml
tracking:
  run:
    name: ${runtime_params:mlflow_run_name, null} # mlflow_run_name can be any name you_
    ↪ want
```

And then pass `mlflow_run_name` runtime param through the CLI:

```
kedro run --params mlflow_run_name="my-awesome-name"
```

Note: The `, null` part of above configuration is the default value which will be used if `mlflow_run_name` is not specified at runtime. In this case, `kedro-mlflow` will use the pipeline name as a run name.

You can nest resolvers, so the following config will default to a random name if the `mlflow_run_name` is not specified at runtime:

```
# mlflow.yml
tracking:
  run:
    name: ${runtime_params:mlflow_run_name, ${km.random_name:}}
```

4.2 Parameters versioning


4.2.1 Automatic parameters versioning

Parameters versioning is automatic when the `MlflowNodeHook` is added to the hook list of the `ProjectContext`. The `mlflow.yml` configuration file has a parameter called `flatten_dict_params` which enables to *log as distinct parameters the (key, value) pairs of a ``Dict`` parameter*.

You **do not need any additional configuration** to benefit from parameters versioning.

4.2.2 How does `MlflowNodeHook` operates under the hood?

The [medium post](#) which introduces hooks explains in detail the different execution steps Kedro executes when the user calls the `kedro run` command.

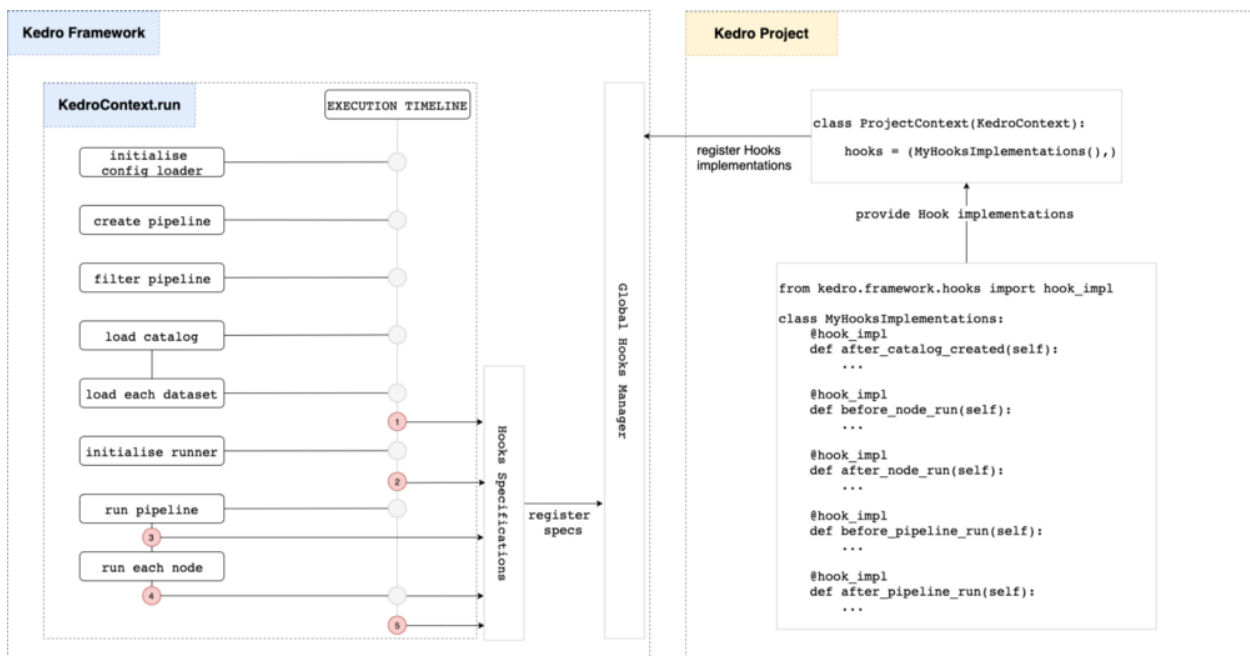

The `MlflowNodeHook` registers the parameters before each node (entry point number 3 on above picture) by calling `mlflow.log_parameter(param_name, param_value)` on each parameters of the node.

4.2.3 Frequently Asked Questions

4.2.3.1 Will parameters be recorded if the pipeline fails during execution?

The parameters are registered node by node (and not in a single batch at the beginning of the execution). If the pipeline fails in the middle of its execution, the **parameters of the nodes who have been run will be recorded, but not the parameters of non executed nodes**.

4.2.3.2 How are parameters detected by the plugin?

The hook **detects parameters through their prefix `params:` or the value parameters**. These are the **reserved keywords used by Kedro to define parameters** in the `pipeline.py` file(s).

4.3 Versioning Kedro DataSets

4.3.1 What is artifact tracking?

Mlflow defines artifacts as “any data a user may want to track during code execution”. This includes, but is not limited to:

- data needed for the model (e.g encoders, vectorizer, the machine learning model itself...)
- graphs (e.g. ROC or PR curve, importance variables, margins, confusion matrix...)

Artifacts are a very flexible and convenient way to “bind” any data type to your code execution. Mlflow has a two-step process for such binding:

1. Persist the data locally in the desired file format
2. Upload the data to the *artifact store*

4.3.2 How to version data in a kedro project?

kedro-mlflow introduces a new `AbstractDataset` called `MlflowArtifactDataset`. It is a wrapper for any `AbstractDataset` which decorates the underlying dataset save method and logs the file automatically in mlflow as an artifact each time the save method is called.

Since it is an `AbstractDataset`, it can be used with the YAML API. Assume that you have the following entry in the `catalog.yml`:

```
my_dataset_to_version:
  type: pandas.CSVDataset
  filepath: /path/to/a/destination/file.csv
```

You can change it to:

```
my_dataset_to_version:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: pandas.CSVDataset # or any valid kedro DataSet
    filepath: /path/to/a/LOCAL/destination/file.csv # must be a local file, wherever
↪ you want to log the data in the end
```

and this dataset will be automatically versioned in each pipeline execution.

4.3.3 Frequently asked questions

4.3.3.1 Can I pass extra parameters to the MlflowArtifactDataset for finer control?

The MlflowArtifactDataset takes a dataset argument which is a python dictionary passed to the `__init__` method of the dataset declared in type. It means that you can pass any argument accepted by the underlying dataset in this dictionary. If you want to pass `load_args` and `save_args` in the previous example, add them in the dataset argument:

```
my_dataset_to_version:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: pandas.CSVDataset # or any valid kedro DataSet
    filepath: /path/to/a/local/destination/file.csv
    load_args:
      sep: ;
    save_args:
      sep: ;
    # ... any other valid arguments for dataset
```

4.3.3.2 Can I use the MlflowArtifactDataset in interactive mode?

Like all Kedro AbstractDataset, MlflowArtifactDataset is callable in the python API:

```
from kedro_mlflow.io.artifacts import MlflowArtifactDataset
from kedro_datasets.pandas import CSVDataset

csv_dataset = MlflowArtifactDataSet(
    dataset={
        "type": CSVDataset, # either a string "pandas.CSVDataset" or the class
        "filepath": r"/path/to/a/local/destination/file.csv",
    }
)
csv_dataset.save(data=pd.DataFrame({"a": [1, 2], "b": [3, 4]}))
```

4.3.3.3 How do I upload an artifact to a non local destination (e.g. an S3 or blob storage)?

The location where artifact will be stored does not depends of the logging function but rather on the artifact store specified when configuring the mlflow server. Read mlflow documentation to see:

- [how to configure a mlflow tracking server](#)
- [how to configure an artifact store with cloud storage.](#)

Setting the `mlflow_tracking_uri` key of `mlflow.yml` to the url of this server is the only additional configuration you need to send your datasets to this remote server. Note that you still need to specify a **local** path for the underlying dataset, mlflow will take care of the upload to the server by itself.

You can refer to [this issue](#) for further details.

4.3.3.4 Can I log an artifact in a specific run?

The `MlflowArtifactDataset` has an extra attribute `run_id` which specifies the run you will log the artifact in. **Be cautious, because this argument will take precedence over the current run** when you call `kedro run`, causing the artifact to be logged in another run that all the other data of the run.

```
my_dataset_to_version:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: pandas.CSVDataset # or any valid kedro DataSet
    filepath: /path/to/a/local/destination/file.csv # must be a local filepath, no_
↳matter what is your actual mlflow storage (S3 or other)
    run_id: 13245678910111213 # a valid mlflow run to log in. If None, default to_
↳active run
```

4.3.3.5 Can I reload an artifact from an existing run to use it in another run ?

You may want to reuse th artifact of a previous run to reuse it in another one, e.g. to continue training from a pretrained model, or to select the best model among several runs created during an hyperparamter tuning. The `MlflowArtifactDataset` has an extra attribute `run_id` you can use to specify from which run you will load the artifact from. **Be cautious, because:**

- this argument will take precedence over the current run** when you call `kedro run`, causing the artifact to be loaded from another run that all the other data of the run
- the artifact will be downloaded and erase the existing file at your local filepath

```
my_dataset_to_reload:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: pandas.CSVDataset # or any valid kedro DataSet
    filepath: /path/to/a/local/destination/file.csv # must be a local filepath, no_
↳matter what is your actual mlflow storage (S3 or other)
    run_id: 13245678910111213 # a valid mlflow run with the existing artifact. It must_
↳be named "file.csv"
```

4.3.3.6 Can I create a remote folder/subfolders architecture to organize the artifacts?

The `MlflowArtifactDataset` has an extra argument `artifact_path` which specifies a remote subfolder where the artifact will be logged. It must be a relative path.

With below example, the artifact will be logged in mlflow within a `reporting` folder.

```
my_dataset_to_version:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: pandas.CSVDataset # or any valid kedro DataSet
    filepath: /path/to/a/local/destination/file.csv
    artifact_path: reporting # relative path where the remote artifact must be stored._
↳if None, saved in root folder.
```

4.4 Version model

4.4.1 What is model tracking?

MLflow allows to serialize and deserialize models to a common format, track those models in MLflow Tracking and manage them using MLflow Model Registry. Many popular Machine / Deep Learning frameworks have built-in support through what MLflow calls [flavors](#). Even if there is no flavor for your framework of choice, it is easy to [create your own flavor](#) and integrate it with MLflow.

4.4.2 How to track models using MLflow in Kedro project?

kedro-mlflow introduces two new `DataSet` types that can be used in `DataCatalog` called `MlflowModelTrackingDataset` and `MlflowModelLocalFileSystemDataset`. The two have very similar API, except that:

- the `MlflowModelTrackingDataset` is used to load from and save to from the mlflow artifact store. It uses optional `run_id` argument to load and save from a given `run_id` which must exist in the mlflow server you are logging to.
- the `MlflowModelLocalFileSystemDataset` is used to load from and save to a given path. It uses the standard `filepath` argument in the constructor of Kedro `DataSets`. Note that it **does not log in mlflow**.

Note: If you use `MlflowModelTrackingDataset`, it will be saved during training in your current run. However, you will need to specify the run id to predict with (since it is not persisted locally, it will not pick the latest model by default). You may prefer to combine `MlflowModelLocalFileSystemDataset` and `MlflowArtifactDataset` to make persist it both locally and remotely, see further.

Suppose you would like to register a `scikit-learn` model of your `DataCatalog` in mlflow, you can use the following `yaml` API:

```
my_sklearn_model:
  type: kedro_mlflow.io.models.MlflowModelTrackingDataset
  flavor: mlflow.sklearn
```

More informations on available parameters are available in the [dedicated section](#).

You are now able to use `my_sklearn_model` in your nodes. Since this model is registered in mlflow, you can also leverage the [mlflow model serving abilities](#) or [predicting on batch abilities](#), as well as the [mlflow models registry](#) to manage the lifecycle of this model.

4.4.3 Frequently asked questions?

4.4.3.1 How is it working under the hood?

For `MlflowModelTrackingDataset`

During save, a model object from node output is logged to mlflow using `log_model` function of the specified `flavor`. It is logged in the `run_id` run if specified and if there is no active run, else in the currently active mlflow run. If the `run_id` is specified and there is an active run, the saving operation will fail. Consequently it will **never be possible to save in a specific mlflow run_id** if you launch a pipeline with the `kedro run` command because the `MlflowHook` creates a new run before each pipeline run.

During load, the model is retrieved from the `run_id` if specified, else it is retrieved from the mlflow active run. If there is no mlflow active run, the loading fails. This will never happen if you are using the `kedro run` command, because the `MlflowHook` creates a new run before each pipeline run.

For `MlflowModelLocalFileSystemDataset`

During save, a model object from node output is saved locally under specified `filepath` using `save_model` function of the specified flavor.

When model is loaded, the latest version stored locally is read using `load_model` function of the specified flavor. You can also load a model from a specific kedro run by specifying the `version` argument to the constructor.

4.4.3.2 How can I track a custom MLflow model flavor?

To track a custom MLflow model flavor you need to set the `flavor` parameter to import the module of your custom flavor and to specify a `pyfunc workflow` which can be set either to `python_model` or `loader_module`. The former is the more high level and user friendly and is *recommended by mlflow* while the latter offer more control. We haven't tested the integration in `kedro-mlflow` of this second workflow extensively, and it should be used with caution.

```
my_custom_model:
  type: kedro_mlflow.io.models.MlflowModelTrackingDataset
  flavor: my_package.custom_mlflow_flavor
  pyfunc_workflow: python_model # or loader_module
```

4.4.3.3 How can I save model locally and log it in MLflow in one step?

If you want to save your model both locally and remotely within the same run, you can leverage `MlflowArtifactDataset`:

```
sklearn_model:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: kedro_mlflow.io.models.MlflowModelLocalFileSystemDataset
    flavor: mlflow.sklearn
    filepath: data/06_models/sklearn_model
```

This might be useful if you want to always read the latest model saved locally and log it to MLflow each time the new model is being trained for tracking purpose.

4.5 Version metrics

4.5.1 What is metric tracking?

MLflow defines a metric as “a (key, value) pair, where the value is numeric”. Each metric can be updated throughout the course of the run (for example, to track how your model's loss function is converging), and MLflow records and lets you visualize the metric's full history”.

4.5.2 How to version metrics in a kedro project?

kedro-mlflow introduces 3 AbstractDataset to manage metrics:

- `MlflowMetricDataset` which can log a float as a metric
- `MlflowMetricHistoryDataset` which can log the evolution over time of a given metric, e.g. a list or a dict of float.
- `MlflowMetricsHistoryDataset`. It is a wrapper around a dictionary with metrics which is returned by node and log metrics in MLflow.

4.5.2.1 Saving a single float as a metric with `MlflowMetricDataset`

The `MlflowMetricDataset` is an `AbstractDataset` which enable to save or load a float as a mlflow metric. You must specify the key (i.e. the name to display in mlflow) when creating the dataset. Some examples follow:

- The most basic usage is to create the dataset and save a a value:

```
from kedro_mlflow.io.metrics import MlflowMetricDataset

metric_ds = MlflowMetricDataset(key="my_metric")
with mlflow.start_run():
    metric_ds.save(
        0.3
    ) # create a "my_metric=0.3" value in the "metric" field in mlflow UI
```

Warning: Unlike mlflow default behaviour, if there is no active run, no run is created.

- You can also specify a `run_id` instead of logging in the active run:

```
from kedro_mlflow.io.metrics import MlflowMetricDataset

metric_ds = MlflowMetricDataset(key="my_metric", run_id="123456789")
with mlflow.start_run():
    metric_ds.save(
        0.3
    ) # create a "my_metric=0.3" value in the "metric" field of the run 123456789
```

It is also possible to pass `load_args` and `save_args` to control which step should be logged (in case you have logged several step for the same metric.) `save_args` accepts a `mode` key which can be set to `overwrite` (mlflow default) or `append`. In `append` mode, if no step is specified, saving the metric will “bump” the last existing step to create a linear history. **This is very useful if you have a monitoring pipeline which calculates a metric frequently to check the performance of a deployed model.**

```
from kedro_mlflow.io.metrics import MlflowMetricDataset

metric_ds = MlflowMetricDataset(
    key="my_metric", load_args={"step": 1}, save_args={"mode": "append"}
)

with mlflow.start_run():
    metric_ds.save(0) # step 0 stored for "my_metric"
    metric_ds.save(0.1) # step 1 stored for "my_metric"
```

(continues on next page)

(continued from previous page)

```
metric_ds.save(0.2) # step 2 stored for "my_metric"

my_metric = metric_ds.load() # value=0.1 (step number 1)
```

Since it is an AbstractDataset, it can be used with the YAML API in your catalog.yml, e.g. :

```
my_model_metric:
  type: kedro_mlflow.io.metrics.MlflowMetricDataset
  run_id: 123456 # OPTIONAL, you should likely let it empty to log in the current run
  key: my_awesome_name # OPTIONAL: if not provided, the dataset name will be sued_
↳ (here "my_model_metric")
  load_args:
    step: ... # OPTIONAL: likely not provided, unless you have a very good reason to_
↳ do so
  save_args:
    step: ... # OPTIONAL: likely not provided, unless you have a very good reason to_
↳ do so
    mode: append # OPTIONAL: likely better than the default "overwrite". Will be_
↳ ignored if "step" is provided.
```

4.5.2.2 Saving the evolution of a metric during training with MlflowMetricHistoryDataset

The MlflowMetricDataset is an AbstractDataset which enable to save or load the evolution of a metric with various formats. You must specify the key (i.e. the name to display in mlflow) when creating the dataset. Some examples follow:

It enables logging either:

- a list of int as a metric with incremental step, e.g [0.1,0.2,0.3] with mode=list for either save_args or load_args

```
from kedro_mlflow.io.metrics import MlflowMetricHistoryDataset

metric_history_ds = MlflowMetricDataset(key="my_metric", save_args={"mode": "list"})

with mlflow.start_run():
    metric_history_ds.save([0.1, 0.2, 0.3]) # will be logged with incremental steps
```

- a dict of {step: value} as a metric:

```
from kedro_mlflow.io.metrics import MlflowMetricHistoryDataset

metric_history_ds = MlflowMetricDataset(key="my_metric", save_args={"mode": "dict"})

with mlflow.start_run():
    metric_history_ds.save(
        {0: 0.1, 1: 0.2, 2: 0.3}
    ) # will be logged with incremental steps
```

- a list of dict [{log_metric_arg: value}] as a metric, e.g:

```
from kedro_mlflow.io.metrics import MlflowMetricHistoryDataset
```

(continues on next page)

(continued from previous page)

```
metric_history_ds = MlflowMetricDataset(key="my_metric", save_args={"mode": "history"})

with mlflow.start_run():
    metric_history_ds.save(
        [
            {"step": 0, "value": 0.1, "timestamp": 1345545},
            {"step": 1, "value": 0.2, "timestamp": 1345546},
            {"step": 2, "value": 0.3, "timestamp": 1345547},
        ]
    )
```

You can combine the different mode for save and load, e.g:

```
from kedro_mlflow.io.metrics import MlflowMetricHistoryDataset

metric_history_ds = MlflowMetricDataset(
    key="my_metric", save_args={"mode": "dict"}, save_args={"mode": "list"}
)

with mlflow.start_run():
    metric_history_ds.save(
        {0: 0.1, 1: 0.2, 2: 0.3}
    ) # will be logged with incremental steps
metric_history_ds.load() # return [0.1,0.2,0.3]
```

As usual, since it is an `AbstractDataset`, it can be used with the YAML API in your `catalog.yml`, and in this case, the `key` argument is optional:

```
my_model_metric:
    type: kedro_mlflow.io.metrics.MlflowMetricHistoryDataset
    run_id: 123456 # OPTIONAL, you should likely let it empty to log in the current run
    key: my_awesome_name # OPTIONAL: if not provided, the dataset name will be used.
    ↪ (here "my_model_metric")
    load_args:
        mode: ... # OPTIONAL: "list" by default, one of {"list", "dict", "history"}
    save_args:
        mode: ... # OPTIONAL: "list" by default, one of {"list", "dict", "history"}
```

4.5.2.3 Saving several metrics with their entire history with `MlflowMetricsHistoryDataset`

Since it is an `AbstractDataset`, it can be used with the YAML API. You can define it in your `catalog.yml` as:

```
my_model_metrics:
    type: kedro_mlflow.io.metrics.MlflowMetricsHistoryDataset
```

You can provide a prefix key, which is useful in situations like when you have multiple nodes producing metrics with the same names which you want to distinguish. If you are using the `v`, it will handle that automatically for you by giving as prefix metrics data set name. In the example above the prefix would be `my_model_metrics`.

Let's look at an example with custom prefix:

```
my_model_metrics:
    type: kedro_mlflow.io.metrics.MlflowMetricsHistoryDataset
    prefix: foo
```

4.5.3 How to return metrics from a node?

Let assume that you have node which doesn't have any inputs and returns dictionary with metrics to log:

```
def metrics_node() -> Dict[str, Union[float, List[float]]]:
    return {
        "metric1": {"value": 1.1, "step": 1},
        "metric2": [{"value": 1.1, "step": 1}, {"value": 1.2, "step": 2}],
    }
```

As you can see above, `kedro_mlflow.io.metrics.MlflowMetricsHistoryDataset` can take metrics as:

- `Dict[str, key]`
- `List[Dict[str, key]]`

To store metrics we need to define metrics dataset in Kedro Catalog:

```
my_model_metrics:
    type: kedro_mlflow.io.metrics.MlflowMetricsHistoryDataset
```

Within a kedro run, the `MlflowHook` will automatically prefix the metrics datasets with their name in the catalog. In our example, the metrics will be stored in Mlflow with the following keys: `my_model_metrics.metric1`, `my_model_metrics.metric2`.

It is also possible to provide a prefix manually:

```
my_model_metrics:
    type: kedro_mlflow.io.metrics.MlflowMetricsHistoryDataset
    prefix: foo
```

which would result in metrics logged as `foo.metric1` and `foo.metric2`.

As any entry in the catalog, the metrics data set must be defined in a Kedro pipeline:

```
def create_pipeline() -> Pipeline:
    return Pipeline(
        node(
            func=metrics_node,
            inputs=None,
            outputs="my_model_metrics",
            name="log_metrics",
        )
    )
```

4.6 Opening the UI

4.6.1 The mlflow user interface

MLflow offers a user interface (UI) that enable to browse the run history.

4.6.2 The kedro-mlflow helper

When you use a local storage for kedro mlflow, you can call a `mlflow cli` command to launch the UI if you do not have a `mlflow tracking server` configured.

To ensure this UI is linked to the tracking uri specified configuration, `kedro-mlflow` offers the following command:

```
kedro mlflow ui
```

which is a wrapper for `kedro ui` command with the tracking uri (as well as the port and host) specified the `mlflow.yml` file.

Opens `http://localhost:5000` in your browser to see the UI after calling previous command. If your `mlflow_tracking_uri` is a `http[s]` URL, the command will automatically open it.

INTRODUCTION

5.1 Pipeline serving with kedro-mlflow

5.1.1 Introduction to Mlflow Models

Mlflow Models are a standardised agnostic format to store machine learning models. They intend to be standalone to be as portable as possible to be deployed virtually anywhere and mlflow provides built-in CLI commands to deploy a mlflow model to most common cloud platforms or to create an API.

A Mlflow Model is composed of:

- a `MLModel` file which is a configuration file to indicate to mlflow how to load the model. This file may also contain the Signature of the model (i.e. the Schema of the input and output of your model, including the columns names and order) as well as example data.
- a `conda.yml` file which contains the specifications of the virtual conda environment inside which the model should run. It contains the packages versions necessary for your model to be executed.
- a `model.pkl` (or a `python_function.pkl` for custom model) file containing the trained model.
- an `artifacts` folder containing all other data necessary to execute the models

Mlflow enable to create custom models “flavors” to convert any object to a Mlflow Model providing we have these informations. Inside a Kedro prprojects, the `Pipeline` and `DataCatalog` objects contains all these informations: as a consequence, it is easy to create a custom model to convert entire Kedro Pipelines to mlflow models.

5.1.2 Pre-requisite for serving a pipeline

You can log any Kedro Pipeline matching the following requirements:

- one of its input must be a `pandas.DataFrame`, a `spark.DataFrame` or a `numpy.array`. This is the **input which contains the data to predict on**. This can be any Kedro `AbstractDataset` which loads data in one of the previous three formats. It can also be a `MemoryDataset` and not be persisted in the `catalog.yml`.
- all its other inputs must be persisted on disk (e.g. if the machine learning model must already be trained and saved so we can export it).

Note: if the pipeline has parameters, they will be persisted before exporting the model, which implies that you will not be able to modify them at runtime. This is a limitation of mlflow.

5.2 Register a pipeline to mlflow with KedroPipelineModel custom mlflow model

kedro-mlflow has a `KedroPipelineModel` class (which inherits from `mlflow.pyfunc.PythonModel`) which can turn any kedro `Pipeline` object to a `Mlflow Model`.

To convert a `Pipeline` to a `mlflow model`, you need to create a `KedroPipelineModel` and then log it to `mlflow`. An example is given in below snippet:

```
from pathlib import Path
from kedro.framework.session import KedroSession
from kedro.framework.startup import bootstrap_project

bootstrap_project(r"<path/to/project>")
session = KedroSession.create(project_path=r"<path/to/project>")

# "pipeline" is the Pipeline object you want to convert to a mlflow model

context = session.load_context() # this setups mlflow configuration
catalog = context.catalog
pipeline = context.pipelines["<my-pipeline>"]
input_name = "instances"

# artifacts are all the inputs of the inference pipelines that are persisted in the
↪ catalog

# (optional) get the schema of the input dataset
input_data = catalog.load(input_name)
model_signature = infer_signature(model_input=input_data)

# you can optionally pass other arguments, like the "copy_mode" to be used for each
↪ dataset
kedro_pipeline_model = KedroPipelineModel(
    pipeline=pipeline, catalog=catalog, input_name=input_name
)

artifacts = kedro_pipeline_model.extract_pipeline_artifacts()

mlflow.pyfunc.log_model(
    artifact_path="model",
    python_model=kedro_pipeline_model,
    artifacts=artifacts,
    conda_env={"python": "3.10.0", dependencies: ["kedro==0.18.11"]},
    model_signature=model_signature,
)
```

Note that you need to provide the `log_model` function a bunch of non trivial-to-retrieve informations (the `conda` environment, the “artifacts” i.e. the persisted data you need to reuse like tokenizers / `ml` models / encoders, the `model signature` i.e. the columns names and types...). The `KedroPipelineModel` object has methods like `extract_pipeline_artifacts` to help you, but it needs some work on your side.

Saving Kedro pipelines as `Mlflow Model` objects is convenient and enable pipeline serving. However, it does not solve the decorrelation between training and inference: each time one triggers a training

pipeline, (s)he must think to save it immediately afterwards. kedro-mlflow offers a convenient API to simplify this workflow, as described in the following sections.

5.3 Register a pipeline to mlflow with KedroPipelineModel custom mlflow model

You can log a Kedro Pipeline to mlflow as a custom model through the CLI with `modelify` command:

```
kedro mlflow modelify --pipeline=<your-pipeline> --input-name <name-in-catalog-of-input-
→data>
```

This command will create a new run with an artifact named `model`. Open the user interface with `kedro mlflow ui` to check the result. You can also:

- specify the run id in which you want to log the pipeline with the `--run-id` argument, and its name with the `--run-name` argument.
- pass almost all arguments accepted by `mlflow.pyfunc.log_model`, see the list of all accepted arguments in the [API documentation](#)

5.4 Automatically log an inference after running the training pipeline

For consistency, you may want to log an inference pipeline (including some data preprocessing and prediction post processing) after you ran a training pipeline, with all the artifacts newly generated (the new model, encoders, vectorizers...).

5.4.1 Getting started

1. Install kedro-mlflow MlflowHook (this is done automatically if you have installed kedro-mlflow in a `kedro>=0.16.5` project)
2. Turn your training pipeline in a PipelineML object with `pipeline_ml_factory` function in your `pipeline_registry.py`:

```
# pipeline_registry.py for kedro>=0.17.2 (hooks.py for ``kedro>=0.16.5, <0.17.2)

from kedro_mlflow_tutorial.pipelines.ml_app.pipeline import create_ml_pipeline

def register_pipelines(self) -> Dict[str, Pipeline]:
    ml_pipeline = create_ml_pipeline()
    training_pipeline_ml = pipeline_ml_factory(
        training=ml_pipeline.only_nodes_with_tags("training"),
        inference=ml_pipeline.only_nodes_with_tags("inference"),
        input_name="instances",
        log_model_kwargs=dict(
            artifact_path="kedro_mlflow_tutorial",
            conda_env={
                "python": 3.10,
                "dependencies": [f"kedro_mlflow_tutorial=={PROJECT_VERSION}"],
            },
        ),
    )
```

(continues on next page)

(continued from previous page)

```

        },
        signature="auto",
    ),
)

return {"training": training_pipeline_ml}

```

3. Persist your artifacts locally in the `catalog.yml`

```

label_encoder:
type: pickle.PickleDataset # <- This must be any Kedro Dataset other than
    ↳ "MemoryDataset"
filepath: data/06_models/label_encoder.pkl # <- This must be a local path, no_
    ↳ matter what is your mlflow storage (S3 or other)

```

4. Launch your training pipeline:

```
kedro run --pipeline=training
```

The inference pipeline will *automagically* be logged as a mlflow model at the end!

5. Go to the UI, retrieve the run id of your “inference pipeline” model and use it as you want, e.g. in the `catalog.yml`:

```

# catalog.yml

pipeline_inference_model:
type: kedro_mlflow.io.models.MlflowModelTrackingDataset
flavor: mlflow.pyfunc
pyfunc_workflow: python_model
artifact_path: kedro_mlflow_tutorial # the name of your mlflow folder = the model_
    ↳ name in pipeline_ml_factory
run_id: <your-run-id>

```

5.4.2 Complete step by step demo project with code

A step by step tutorial with code is available in the [kedro-mlflow-tutorial repository on github](#).

You have also other resources to understand the rationale:

- an explanation of the *PipelineML class in the python objects section*
- detailed explanations [on this issue](#).
- an example of use in a user project [in this repo](#).

5.4.3 Motivation

You can find more about the motivations in https://kedro-mlflow.readthedocs.io/en/stable/source/05_framework_ml/index.html.

5.5 Deployment patterns for kedro pipelines

A step by step tutorial with code is available in the [kedro-mlflow-tutorial repository on github](#) which explains how to serve the pipeline as an API or a batch.

INTRODUCTION

6.1 Why we need a mlops framework to manage machine learning development lifecycle

6.1.1 Machine learning deployment is hard because it comes with a lot of constraints and no adequate tooling

6.1.1.1 Identifying the challenges to address when deploying machine learning

It is a very common pattern to hear that “machine learning deployment is hard”, and this is supposed to explain why so many firms do not achieve to insert ML models in their IT systems (and consequently, not make money despite consequent investments in ML).

On the other hand, you can find thousands of tutorial across the web to explain how to deploy a ML API in 5 min, either locally or on the cloud. There is also a large amount of training sessions which can teach you “how to become a machine learning engineer in 3 months”.

Who is right then? Both!

Actually, there is a confusion on what “deployment” means, especially in big enterprises that are not “tech native” or for newbies in ML world. Serving a model over an API pattern is a start, but you often need to ensure (at least) the following properties for your system:

- **scalability and cost control:** in many cases, you need to be able to deal with a lot of (possibly concurrent) requests (likely much more than during training phase). It may be hard to ensure that the app will be able to deal with such an important amount of data. Another issue is that ML often needs specific infrastructure (e.g., GPU’s) which are very expensive. Since the request against the model often vary wildly over time, it may be important to adapt the infrastructure in real time to avoid a lot of infrastructure costs
- **speed:** A lot of recent *state of the art* (SOTA) deep learning / ensemble models are computationally heavy and this may hurt inference speed, which is critical for some systems.
- **disponibility and resilience:** Machine learning systems are more complex than traditional softwares because they have more moving parts (i.e. data and parameters). This increases the risk of errors, and since ML systems are used for critical systems making both the infrastructure and the code robust is key.
- **portability / ease of integration with external components:** ML models are not intended to be directly used by the end users, but rather be consumed by another part of your system (e.g a call to an API). To speed up deployment, your model must be easy to be consumed, i.e. *as self contained as possible*. As a consequence, you must **deploy a ML pipeline which handles business objects instead of only a ML model**. If the other part which consumes your API needs to make a lot of data preprocessing *before* using your model, it makes it:
 - very risky to use, because preprocessing and model are decoupled: any change in your model must be reflected in this other data pipeline and there is a huge mismatch risk when redeploying

- slow and costful to deploy because each deployment of your model needs some new development on the client side
- poorly reusable because each new app who wants to use the model needs some specific development on its own
- **reproducibility:** the ML development is very iterative by nature. You often try a simple baseline model and iterate (sometimes directly by discussing with the final user) to finally get the model that suits the most your needs (which is the balance between speed / accuracy / interpretability / maintenance costs / inference costs / data availability / labelling costs...). Looping through these iterations, it is very easy to forget what was the best model. You should not rely only on your memory to compare your experiments. Moreover, many countries have regulatory constraints to avoid discriminations (e.g. GDPR in the EU), and you must be able to justify how your model was built and to that extent reproducibility is key. It is also essential when you redeploy a model that turns out to be worse than the old one and you have to rollback fast.
- **monitoring and ease of redeployment:** It is well known that model quality decay over time (sometimes quickly!), and if you use ML for a critical activity, you will have to retrain your model periodically to maintain its performance. It is critical to be able to redeploy easily your model. This implies that retraining (or even redeployment of a new model) must be as **automated as possible** to ensure deployment speed and model quality.

An additional problem that happens in real world is that it is sometimes poorly understood by end users that the ML model is not standalone. It implies **external developments** from the client side (at least to call the model, sometimes to adapt a data pipeline or to change the user interface to add the ML functionality) and they have hard times to understand the entire costs of a ML project as well as their responsibilities in the project. This is not really a problem of ML but rather on how to give a minimal culture on ML to business end users.

6.1.1.2 A comparison between traditional software development and machine learning projects

6.1.1.2.1 ML and traditional software have different moving parts

A traditional software project contains several moving parts:

- code
- environment (packages versions...)
- infrastructure (build on Windows, deploy on linux)

Since it is a more mature industry, efficient tools exist to manage these items (Git, pip/conda, infra as code...). On the other hand, a ML project has additional moving parts:

- parameters
- data

As ML is a much less mature field, efficient tooling to address these items are very recent and not completely standardized yet (e.g. Mlflow to track parameters, DVC to version data, **great-expectations** to monitor data which go through your pipelines, tensorboard to monitor your model metrics...)

Mlflow is one of the most mature tool to manage these new moving parts.

6.1.1.2.2 ML and traditional software have different development lifecycles

In traditional software, the development workflow is roughly the following:

- you create a git branch
- you develop your new feature
- you add tests and ensure there are no regression
- you merge the branch on the main branch to add your feature to the codebase

This is a **linear** development process based on **determinist** behaviour of the code.

However in ML development, the workflow is much more iterative and may looklike this:

- you create a notebook
- you make some exploration on the data with some descriptive analysis and a baseline model
- you switch to a git branch and python scripts once the model is quite stable
- you retrain the model, eventually do some parameter tuning
- you merge your code on the main branch to share your work

If you need to modify the model later (do a different preprocessing, change the model type...), you do not **add** code to the codebase, you **modify** the existing code. This makes unit testing much harder because the desired features change over time.

The other difficulty when testing machine learning applications is it hard to test for regression, since the model depends on underlying data and the chosen metrics. If a new model performs slightly better or worse than the previous one on the same dataset, it may be due to randomness and not to code quality. If the metric varies on a different dataset, it is even harder to know if it is due to code quality or to innate randomness.

This is a **cyclic** development process based on a **stochastic** behaviour of the code.

Kedro is a very new tool and cannot be called “mature” at this stage but tries to solve this development lifecycle with a very fluent API to create and modify machine learning pipelines.

6.1.2 Deployment issues addressed by kedro-mlflow and their solutions

6.1.2.1 Out of scope

We will focus on machine learning *development* lifecycle. As a consequence, these items are out of scope:

- Orchestration
- Issues related to infrastructure (related, but not limited to, the 3 first items of above list: scalability and cost control, inference speed, disponibility and resilience)
- Issues related to model monitoring: Data distribution changes over time, model decay, data access...

6.1.2.2 Issue 1: The training process is poorly reproducible

The main reason which explains why training is hard to reproduce is the iterative process. Data scientists launch several times the same run with slightly different parameters / data / preprocessing. If they rely on their memory to compare these runs, they will likely struggle to remember what was the best one.

kedro-mlflow offers automatic parameters versioning when a pipeline is ran to easily link a model to its training parameters.

Note that there is also a lot of “innate” randomness in ML pipelines and if a seed is not set explicitly as a parameter, the run will likely not be reproducible (separation train/test/validation, moving underlying data sources, random initialisation for optimizers, random split for bootstrap...).

6.1.2.3 Issue 2: The data scientist and stakeholders focus on training

While building the ML model, the inference pipeline is often completely ignored by the data scientist. The best example are Kaggle competitions where a very common workflow is the following:

- merge the training and the test data at the beginning of their script
- do the preprocessing on the entire dataset
- resplit just before training the model
- train the model on training data
- predict on test data
- analyze their metrics, finetune their hyper parameters
- submit their predictions as data (i.e. as a file) to Kaggle

The very important issue which arises with such a workflow is that **you completely ignore the non reproducibility which arises from the preprocessing (encoding, randomness...)**. Most Kaggle solutions are never tested on an end to end basis, i.e. by running the inference pipeline from the test data input file to the predictions file. This facilitates very bad coding practices and teaches beginner data scientists bad software engineering practice.

kedro-mlflow enables to log the inference pipeline as a Mlflow Model (through a `KedroPipelineModel` class) to ensure that you deploy the inference pipeline as a whole.

6.1.2.4 Issue 3: Inference and training are entirely decoupled

As stated previous paragraph, the inference pipeline is not a primary concern when experimenting and developing your model. This raises strong reproducibility issues. Assume that you have logged the model and all its parameters when training (which is a good point!), you will still need to retrieve the code used during training to create the inference pipeline. This is in my experience quite difficult:

- in the best case, you have trained the model from a git sha which is logged in mlflow. Any potential user can (but it takes time) recreate the exact inference pipeline from your source code, and retrieve all necessary artifacts from mlflow. This is tedious, error prone, and gives a lot of responsibility and work to your end user, but at least it makes your model usable.
- most likely, you did not train your model from a version control commit. While experimenting /debug, it is very common to modify the code and retrain without committing. The exact code associated to a given model will likely be impossible to find out later.

kedro-mlflow offers a `PipelineML` (and its helpers `pipeline_ml_factory`) class which binds the training and inference pipeline, and a hook which autolog such pipelines when they are run. This enables data scientists to ensure that each training model is logged with its associated inference pipeline,

and is ready to use for any end user. This decreases a lot the necessary cognitive complexity to ensure coherence between training and inference.

6.1.2.5 Issue 4: Data scientists do not handle business objects

It is often said that data scientists deliver machine learning *models*. This assumes that all the preprocessing will be recoded the end user of your model. This is a major cause of poor adoption of your model in an enterprise setup because it makes your model:

- hard to use (developments are need on the client side)
- hard to update (it needs code update from the end user)
- very error prone (never trust the client!)

If you struggle representing it, imagine that you have developed a NLP model. Would you really ask your end user to give you a one-hot encoded matrix or BERT-tokenized texts with your custom embeddings and vocabulary?

Your model must handle business objects (e.g. a mail, a movie review, a customer with its characteristic, a raw image...) to be usable.

Kedro Pipeline's are able to handle processing from the business object to the prediction. Your real model must be a Pipeline, and the `KedroPipelineModel` of `kedro-mlflow` helps to store them and log them in mlflow. Additionally, `kedro-mlflow` suggests how your project should be organized in "apps" to make this transition easy.

6.1.2.6 Overcoming these problems: support an organisational solution with an efficient tool

`kedro-mlflow` assume that we declare a clear contrat of what the output of the data science project is: it is an an inference pipeline. This defines a clear "definition of done" of the data science project: is it ready to deploy?

The downside of such an approach is that it increases data scientist's responsibilities, because s(he) is responsible for his code.

`kedro-mlflow` offers a very convenient way (through the `pipeline_ml_factory` function) to make sure that each experiment will result in creating a compliant "output".

This is very transparent for the data scientist who have no extra constraints (apart from developing in Kedro) to respect this contract. Hence, the data scientist still benefits from the interactivity he needs to work. This is why we want to leverage Kedro which is very flexible and offers a convenient way to transition from notebooks to pipeline, and leverage Mlflow for standardising the definiton of an "output" of a datascience project.

Enforcing these solutions with a tool: `kedro-mlflow` at the rescue

6.2 The components of a machine learning application

6.2.1 Definition: apps of a machine learning projects

A machine learning project is composed of 3 main blocks that I will call "apps" in the rest of the paragraph. These 3 apps are:

- The *etl_app*, which is the application in charge of bringing the data to the machine learning pipeline
- The *ml_app*, which is the application in charge of managing the machine learning model (including training and inference)

- The *user_app* which is the application in charge of consuming the predictions of the machine learning model and doing the actual business logic with it

6.2.2 Difference between an app and a Kedro pipeline

Note that the previously defined “apps” are not pipelines in the Kedro sense. On the contrary, each app likely contain several (Kedro?) pipelines.

The main differences between these apps are:


- Each app development / deployment is likely under the responsibility of different people / teams.
- Each app has a different development lifecycle. It implies that development can be parallelized, and releasing one app to fix a bug does not imply to release the other ones. If your training pipeline is time /resources consuming, you do not want a bugfix in the *user_app* to trigger a retraining of your model, do you?
- Each app has its own orchestration timeline. For instance, the data produced by the etl can be stored independently of whether the *user_app* and the *ml_app* consume them “on the fly” or not.
- Each app do not communicate with the other apart from a clear interface: the data schema accepted as inputs/ output of each app.

6.2.3 Apps development lifecycle in a machine learning project

6.2.3.1 The data scientist creates at least part of the 3 apps

Note that there are **as many *etl_app* and *user_app*** as needed for the different use of your model. Since **training the model is a specific use, the data scientist will need one to create its own *etl_app* and *user_app***. These apps will very likely be replaced later by the true business app dedicated to the model use.

We saw that the data scientist has to create some code that will be replaced by other people code when deploying the model. As a consequence, the interactions between these apps must be very clearly defined at the beginning of the project. We claim that it is possible to cover most use case with the following schema:

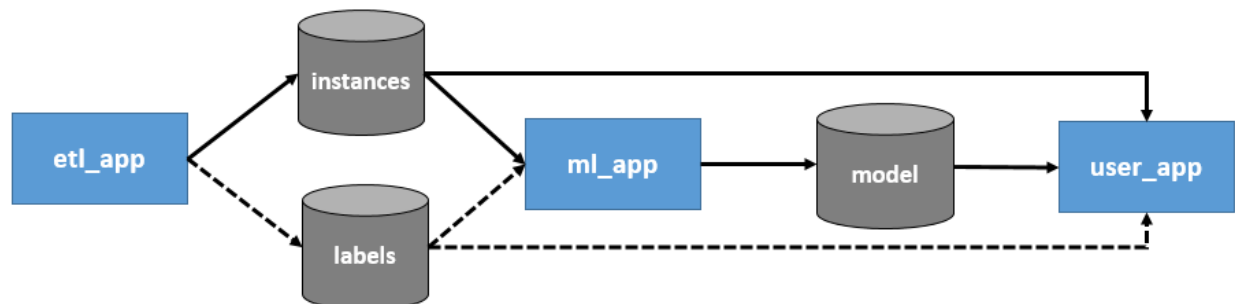

The *ml_app* takes *instances* (i.e. examples of the business object to handle) as input. This implies that the *ml_app* will include some machine learning-specific preprocessing and not only the model training. It also (optionally) takes labels as inputs if the underlying problem is supervised. Even in this situation, the labels will not be known at inference time so the *etl_app* does not necessarily produce them.

This is a key principle: anyone who wants to consume the model later will need to bring instances of the same business object.

6.2.3.2 The *etl_app*

The *etl_app* is the one in charge of bringing the data to the *ml_app*. As a consequence, each different *user_app* will likely have to develop its associated *etl_app* to consume the *ml_app*.

From the data scientist point of view, this app will create the training dataset. This app can do very different things:

- send request over an API
- extract from a database (with SQL, SAS...)
- scrape data from a website
- download data from an URL
- read data from disk
- ...

For the labels, in addition of above possibility, this app can be a **labelling tool** with human labellers who provide the needed “true reference” as labels.

It is also common to mix several of above approaches to gather different data sources, and to have different Kedro pipelines in this app.

Note that during a training, this app very likely retrieves batch data from a given time period. This will necessarily be different when using the model, because the user often want to use live stream data.

6.2.3.3 The *ml_app*

This app is the core of the data scientist work. It is at least composed of two kedro pipelines:

- a *training* pipeline, which produces all the artifacts (e.g. any object fitted on data, including obviously the machine learning model itself)
- an *inference* pipeline which takes an instance as input and returns the prediction of the model

It is quite common to have other pipelines depending on the data scientist needs (an *evaluation* pipelines which produces metrics for a given model, an *explanation* pipeline to produce explanation for a specific instance like shap values or importance pixel, ...).

It is quite common to see data scientists duplicate the code when creating the inference pipeline, because it is written after the training pipeline. **Thanks to kedro tags, it is possible to mark a node to use it in two different pipelines.** Reuse is a key component to improve quality and deployment speed. **Each time a node is created (i.e. a function is called), the data scientist should wonder if it will be used in *training* pipeline only or in both (*training* and *inference*), and tag it accordingly.**

6.2.3.4 The *user_app*

The *user_app* must not be aware of how the inference pipeline operates under the hood. The *user_app* must either:

- takes a *run_id* from mlflow to retrieve the model from mlflow and predict with it. This is mainly useful for batch predictions.
- call the served model from an API endpoint and only get predictions as inputs. This assumes that the model has been served, which is very easy with mlflow.

After that, the *user_app* can use the predictions and apply any needed business logic to them.

6.3 kedro-mlflow mlops solution

6.3.1 Reminder

We assume that we want to solve the following challenges among those described in “*Why we need a mlops framework*” section:

- serve pipelines (which handles business objects) instead of models
- synchronize training and inference by packaging inference pipeline at training time

6.3.2 Enforcing these principles with a dedicated tool

6.3.2.1 Synchronizing training and inference pipeline

To solve the problem of desynchronization between training and inference, `kedro-mlflow` offers a `PipelineML` class (which subclasses Kedro `Pipeline` class). A `PipelineML` is simply a Kedro standard `Pipeline` (the “training”) which has a reference to another `Pipeline` (the “inference”). The two pipelines must share a common input `DataSet` name, which represents the data you will perform operations on (either train on for the training pipeline, or predict on for the inference pipeline).

This class implements several methods to compare the `DataCatalogs` associated to each of the two binded pipelines and performs subsetting operations. This makes it quite difficult to handle directly. Fortunately, `kedro-mlflow` provides a convenient API to create `PipelineML` objects: the `pipeline_ml_factory` function.

The use of `pipeline_ml_factory` is very straightforward, especially if you have used the *project architecture described previously*. The best place to create such an object is your `hooks.py` file which will look like this:

```
# hooks.py
from kedro_mlflow_tutorial.pipelines.ml_app.pipeline import create_ml_pipeline

class ProjectHooks:
    @hook_impl
    def register_pipelines(self) -> Dict[str, Pipeline]:
        ml_pipeline = create_ml_pipeline()

        # convert your two pipelines to a PipelineML object
        training_pipeline_ml = pipeline_ml_factory(
            training=ml_pipeline.only_nodes_with_tags("training"),
            inference=ml_pipeline.only_nodes_with_tags("inference"),
            input_name="instances",
        )

        return {"__default__": training_pipeline_ml}
```

So, what? We have created a link between our two pipelines, but the gain is not obvious at first glance. The 2 following sections demonstrates that such a construction enables to package and serve automatically the inference pipeline when executing the training one.

6.3.2.2 Packaging and serving a Kedro Pipeline

Mlflow offers the possibility to create `custom model class`. Mlflow offers a variety of tool to package/containerize, deploy and serve such models.

kedro-mlflow has a `KedroPipelineModel` class (which inherits from `mlflow.pyfunc.PythonModel`) which can turn any kedro `PipelineML` object to a Mlflow Model.

To convert a `PipelineML`, you need to declare it as a `KedroPipelineModel` and then log it to mlflow:

```
from pathlib import Path
from kedro.framework.context import load_context
from kedro_mlflow.mlflow import KedroPipelineModel
from mlflow.models import ModelSignature

# pipeline_training is your PipelineML object, created as previously
catalog = load_context(".").io

# artifacts are all the inputs of the inference pipelines that are persisted in the
↪ catalog
artifacts = pipeline_training.extract_pipeline_artifacts(catalog)

# (optional) get the schema of the input dataset
input_data = catalog.load(pipeline_training.input_name)
model_signature = infer_signature(model_input=input_data)

kedro_model = KedroPipelineModel(pipeline=pipeline_training, catalog=catalog)

mlflow.pyfunc.log_model(
    artifact_path="model",
    python_model=kedro_model,
    artifacts=artifacts,
    conda_env={"python": "3.10.0", dependencies: ["kedro==0.18.11"]},
    signature=model_signature,
)
```

Note that you need to provide the `log_model` function a bunch of non trivial-to-retrieve informations (the conda environment, the “artifacts” i.e. the persisted data you need to reuse like tokenizers / ml models / encoders, the model signature i.e. the columns names and types...). The `PipelineML` object has methods like `extract_pipeline_artifacts` to help you, but it needs some work on your side.

Saving Kedro pipelines as Mlflow Model objects is convenient and enable pipeline serving. However, it does not solve the decorelation between training and inference: each time one triggers a training pipeline, (s)he must think to save it immediately afterwards. Good news: triggering operations at some “execution moment” of a Kedro Pipeline (like after it finished running) is exactly what hooks are designed for!

6.3.2.3 kedro-mlflow’s magic: inference autologging

When running the training pipeline, we have all the desired informations we want to pass to the `KedroPipelineModel` class and `mlflow.pyfunc.log_model` function:

- the artifacts exist in the `DataCatalog` if they are persisted
- the “instances” dataset is loaded at the beginning of training, thus we can infer its schema (columns names and types)
- the inference and training pipeline codes are retrieved at the same moments, so consistency checks can be performed

Hence, `kedro-mlflow` provides a `MlflowHook.after_pipeline_run` hook which performs the following operations:

- check if the pipeline that have ust been run is a `PipelineML` object
- in case it is, create the `KedroPipelineModel` like above and log it to `mlflow`

We have achieved perfect synchronicity since the exact inference pipeline (with code, and artifacts) will be logged in `mlflow` each time the training pipeline is executed. The model is than accessible in the `mlflow` UI “artifacts” section and can be downloaded, or served as an API with the `mlflow serve` command, or it can be used in the `catalog.yml` with the `MlflowModelTrackingDataset` for further reuse.

6.3.2.4 Reuse the model in kedro

Say that you an to reuse this inference model as the input of another kedro pipeline (one of the “user_app” application). `kedro-mlflow` provides a `MlflowModelTrackingDataset` class which can be used int the `catalog.yml` file:

```
# catalog.yml

pipeline_inference_model:
  type: kedro_mlflow.io.models.MlflowModelTrackingDataset
  flavor: mlflow.pyfunc
  pyfunc_workflow: python_model
  artifact_path: kedro_mlflow_tutorial # the name of your mlflow folder = the model_
↪name in pipeline_ml_factory
  run_id: <your-run-id>
```

INTRODUCTION

7.1 How to use kedro-mlflow in a notebook

Important: You need to install `ipython` to access notebook functionalities.

7.1.1 Reminder on mlflow's limitations with interactive use

Data science project lifecycle are very iterative. Mlflow intends to track parameters changes to improve reproducibility. However, one must be conscious that being able to **execute functions outside of a end to end pipeline** puts a strong burden on the user shoulders **because he is in charge to make the code execution coherent** by running the notebooks cells in the right order. Any back and forth during execution to change some parameters in a previous notebook cells and then retrain a model creates an operational risk that the recorded parameter stored in mlflow is different than the real parameter used for training the model.

To make a long story short: **forget about efficient reproducibility** when using mlflow interactively.

It may **still be useful to track some experiments results** especially if they are long to run and vary wildly with parameters, e.g. if you are performing hyperparameter tuning.

These limitations are inherent to the data science process, not to mlflow itself or the plugin.

7.1.2 Setup mlflow configuration in your notebook

Open your notebook / ipython session with the Kedro CLI:

```
kedro jupyter notebook
```

Or if you are on JupyterLab,

```
%load_ext kedro.ipython
```

Kedro **creates a bunch of global variables**, including a `session`, a `context` and a `catalog` which are automatically accessible.

When the context was created, `kedro-mlflow` automatically:

- loaded and setup (create the tracking uri, export credentials...) the mlflow configuration of your `mlflow.yml`
- import `mlflow` which is now accessible in your notebook

If you change your `mlflow.yml`, reload the kedro extension for the changes to take effect.

7.1.3 Difference with running through the CLI

- The `DataSets` load and save methods works as usual. You can call `catalog.save("my_artifact_dataset", data)` inside a cell, and your data will be logged in mlflow properly (assuming “my_artifact_dataset” is a `kedro_mlflow.io.MlflowArtifactDataset`).
- The hooks which automatically save all parameters/metrics/artifacts in mlflow will work if you run the session interactively, e.g.:

```
session.run(  
    pipeline_name="my_ml_pipeline",  
    tags="training",  
    from_inputs="data_2",  
    to_outputs="data_7",  
)
```

but it is not very likely in a notebook.

- if you need to interact manually with the mlflow server, you can use `context.mlflow.server._mlflow_client`.

7.1.4 Guidelines and best practices suggestions

During experimentation phase, you will likely not run entire pipelines (or sub pipelines filtered out between some inputs and outputs). Hence, you cannot benefit from Kedro’s hooks (and hence from `kedro-mlflow` tracking). From this moment on, perfect reproducibility is impossible to achieve: there is no chance that you manage to maintain a perfectly linear workflow, as you will go back and forth modifying parameters and code to create your model.

I suggest to :

- **focus on versioning parameters and metrics.** The goal is to finetune your hyperparameters and to be able to remember later the best setup. It is not very important to this stage to version all parameters (e.g. preprocessing ones) nor models (after all you will need an entire pipeline to predict and it is very unlikely that you will need to reuse these experiment models one day.) It may be interesting to use `mlflow.autolog()` feature to have a easy basic setup.
- **transition quickly to kedro pipelines.** For instance, when you preprocessing is roughly defined, try to put it in kedro pipelines. You can then use notebooks to experiment / perform hyperparameter tuning while keeping preprocessing “fixed” to enhance reproducibility. You can run this pipeline interactively with :

```
res = session.run(  
    pipeline_name="my_preprocessing_pipeline",  
    tags="training",  
    from_inputs="data_2",  
    to_outputs="data_7",  
)
```

`res` is a python dict with the outputs of your pipeline (e.g. a “preprocessed_data” `pandas.DataFrame`), and you can use it interactively in your notebook.

INTRODUCTION

8.1 New DataSet

8.1.1 MlflowArtifactDataset

MlflowArtifactDataset is a wrapper for any AbstractDataset which logs the dataset automatically in mlflow as an artifact when its save method is called. It can be used both with the YAML API:

```
my_dataset_to_version:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: pandas.CSVDataset # or any valid kedro DataSet
    filepath: /path/to/a/local/destination/file.csv
```

or with additional parameters:

```
my_dataset_to_version:
  type: kedro_mlflow.io.artifacts.MlflowArtifactDataset
  dataset:
    type: pandas.CSVDataset # or any valid kedro DataSet
    filepath: /path/to/a/local/destination/file.csv
    load_args:
      sep: ;
    save_args:
      sep: ;
    # ... any other valid arguments for dataset
  run_id: 13245678910111213 # a valid mlflow run to log in. If None, default to ↪
↪ active run
  artifact_path: reporting # relative path where the artifact must be stored. if None,
↪ saved in root folder.
```

or with the python API:

```
from kedro_mlflow.io.artifacts import MlflowArtifactDataset
from kedro_datasets.pandas import CSVDataset

csv_dataset = MlflowArtifactDataset(
    dataset={"type": CSVDataset, "filepath": r"/path/to/a/local/destination/file.csv"}
)
csv_dataset.save(data=pd.DataFrame({"a": [1, 2], "b": [3, 4]}))
```

8.1.2 Metrics DataSets

8.1.2.1 MlflowMetricDataset

The `MlflowMetricDataset` is documented [here](#).

8.1.2.2 MlflowMetricHistoryDataset

The `MlflowMetricHistoryDataset` is documented [here](#).

8.1.3 Models DataSets

8.1.3.1 MlflowModelTrackingDataset

The `MlflowModelTrackingDataset` accepts the following arguments:

- `flavor` (str): Built-in or custom MLflow model flavor module. Must be Python-importable.
- `run_id` (Optional[str], optional): MLflow run ID to use to load the model from or save the model to. It plays the same role as “filepath” for standard mlflow datasets. Defaults to None.
- `artifact_path` (str, optional): the run relative path to the model.
- `pyfunc_workflow` (str, optional): Either `python_model` or `loader_module`. See [mlflow workflows](#).
- `load_args` (Dict[str, Any], optional): Arguments to `load_model` function from specified flavor. Defaults to None.
- `save_args` (Dict[str, Any], optional): Arguments to `log_model` function from specified flavor. Defaults to None.

You can either only specify the flavor:

```
from kedro_mlflow.io.models import MlflowModelTrackingDataset
from sklearn.linear_model import LinearRegression

mlflow_model_tracking = MlflowModelTrackingDataset(flavor="mlflow.sklearn")
mlflow_model_tracking.save(LinearRegression())
```

Let assume that this first model has been saved once, and you want to retrieve it (for prediction for instance):

```
mlflow_model_tracking = MlflowModelTrackingDataset(
    flavor="mlflow.sklearn", run_id="<the-model-run-id>"
)
my_linear_regression = mlflow_model_tracking.load()
my_linear_regression.predict(
    data
) # will obviously fail if you have not fitted your model object first :)
```

You can also specify some logging parameters:

```
mlflow_model_tracking = MlflowModelTrackingDataset(
    flavor="mlflow.sklearn",
    run_id="<the-model-run-id>",
    save_args={
```

(continues on next page)

(continued from previous page)

```

        "conda_env": {"python": "3.10.0", "dependencies": ["kedro==0.18.11"]},
        "input_example": data.iloc[0:5, :],
    },
)
mlflow_model_tracking.save(LinearRegression().fit(data))

```

As always with kedro, you can use it directly in the `catalog.yml` file:

```

my_model:
  type: kedro_mlflow.io.models.MlflowModelTrackingDataset
  flavor: "mlflow.sklearn"
  run_id: <the-model-run-id>,
  save_args:
    conda_env:
      python: "3.10.0"
      dependencies:
        - "kedro==0.18.11"

```

8.1.3.2 MlflowModelLocalFileSystemDataset

The `MlflowModelTrackingDataset` accepts the following arguments:

- `flavor` (str): Built-in or custom MLflow model flavor module. Must be Python-importable.
- `filepath` (str): Path to store the dataset locally.
- `pyfunc_workflow` (str, optional): Either `python_model` or `loader_module`. See [mlflow workflows](#).
- `load_args` (Dict[str, Any], optional): Arguments to `load_model` function from specified flavor. Defaults to None.
- `save_args` (Dict[str, Any], optional): Arguments to `save_model` function from specified flavor. Defaults to None.
- `version` (Version, optional): Kedro version to use. Defaults to None.

The use is very similar to `MlflowModelTrackingDataset`, but you have to specify a local filepath instead of a `run_id`:

```

from kedro_mlflow.io.models import MlflowModelTrackingDataset
from sklearn.linear_model import LinearRegression

mlflow_model_tracking = MlflowModelLocalFileSystemDataset(
    flavor="mlflow.sklearn", filepath="path/to/where/you/want/model"
)
mlflow_model_tracking.save(LinearRegression().fit(data))

```

The same arguments are available, plus an additional `version` common to usual `AbstractVersionedDataset`

```

mlflow_model_tracking = MlflowModelLocalFileSystemDataset(
    flavor="mlflow.sklearn",
    filepath="path/to/where/you/want/model",
    version="<valid-kedro-version>",
)
my_model = mlflow_model_tracking.load()

```

and with the YAML API in the `catalog.yml`:

```
my_model:
  type: kedro_mlflow.io.models.MlflowModelLocalFileSystemDataset
  flavor: mlflow.sklearn
  filepath: path/to/where/you/want/model
  version: <valid-kedro-version>
```

8.1.3.3 MlflowModelRegistryDataset

The `MlflowModelRegistryDataset` accepts the following arguments:

- `model_name` (str): The name of the registered model is the mlflow registry
- `stage_or_version` (str): A valid stage (either “staging” or “production”) or version number for the registered model. Default to “latest” which fetch the last version and the higher “stage” available.
- `flavor` (str): Built-in or custom MLflow model flavor module. Must be Python-importable.
- `pyfunc_workflow` (str, optional): Either `python_model` or `loader_module`. See [mlflow workflows](#).
- `load_args` (Dict[str, Any], optional): Arguments to `load_model` function from specified flavor. Defaults to None.

We assume you have registered a mlflow model first, either [with the MlflowClient](#) or [within the mlflow ui](#), e.g. :

```
from sklearn.tree import DecisionTreeClassifier

import mlflow
import mlflow.sklearn

with mlflow.start_run():
    model = DecisionTreeClassifier()

    # Log the sklearn model and register as version 1
    mlflow.sklearn.log_model(
        sk_model=model, artifact_path="model", registered_model_name="my_awesome_model"
    )
```

You can fetch the model by its name:

```
from kedro_mlflow.io.models import MlflowModelRegistryDataset

mlflow_model_tracking = MlflowModelRegistryDataset(model_name="my_awesome_model")
my_model = mlflow_model_tracking.load()
```

and with the YAML API in the `catalog.yml` (only for loading an existing model):

```
my_model:
  type: kedro_mlflow.io.models.MlflowModelRegistryDataset
  model_name: my_awesome_model
```

8.2 Hooks

This package provides 1 new hook.

8.2.1 MlflowHook

This hook :

1. manages mlflow settings at the beginning and the end of the run (run start / end).
2. autolog nodes parameters each time the pipeline is run (with `kedro run` or programatically).
3. log useful informations for reproducibility as mlflow tags (including kedro Journal information for old kedro versions and the commands used to launch the run).
4. register the pipeline as a valid mlflow model if *it is a PipelineML instance*

8.3 Pipelines

8.3.1 PipelineML and pipeline_ml_factory

PipelineML is a new class which extends Pipeline and enable to bind two pipelines (one of training, one of inference) together. This class comes with a KedroPipelineModel class for logging it in mlflow. A pipeline logged as a mlflow model can be served using `mlflow models serve` and `mlflow models predict` command.

The PipelineML class is not intended to be used directly. A `pipeline_ml_factory` factory is provided for user friendly interface.

Example within kedro template:

```
# in src/PYTHON_PACKAGE/pipeline.py

from PYTHON_PACKAGE.pipelines import data_science as ds

def create_pipelines(**kwargs) -> Dict[str, Pipeline]:
    data_science_pipeline = ds.create_pipeline()
    training_pipeline = pipeline_ml_factory(
        training=data_science_pipeline.only_nodes_with_tags(
            "training"
        ), # or whatever your logic is for filtering
        inference=data_science_pipeline.only_nodes_with_tags("inference"),
    )

    return {
        "ds": data_science_pipeline,
        "training": training_pipeline,
        "__default__": data_engineering_pipeline + data_science_pipeline,
    }
```

Now each time you will run `kedro run --pipeline=training` (provided you registered MlflowHook in you run.py), the full inference pipeline will be registered as a mlflow model (with all the outputs produced by training as artifacts : the machine learning model, but also the *scaler*, *vectorizer*, *imputer*, or whatever object fitted on data you create in training and that is used in inference).

Note that:

- the inference pipeline `input_name` can be a `MemoryDataset` and it belongs to inference pipeline inputs
- Apart from `input_name`, all other inference pipeline inputs must be persisted locally on disk (i.e. it must not be `MemoryDataset` and must have a local filepath)
- the inference pipeline inputs must belong to training outputs (vectorizer, binarizer, machine learning model...)
- the inference pipeline must have one and only one output

Note: If you want to log a `PipelineML` object in `mlflow` programmatically, you can use the following code snippet:

```
from pathlib import Path
from kedro.framework.context import load_context
from kedro_mlflow.mlflow import KedroPipelineModel
from mlflow.models import ModelSignature

# pipeline_training is your PipelineML object, created as previously
catalog = load_context(".").io

# artifacts are all the inputs of the inference pipelines that are persisted in the
# catalog
artifacts = pipeline_training.extract_pipeline_artifacts(catalog)

# get the schema of the input dataset
input_data = catalog.load(pipeline_training.input_name)
model_signature = infer_signature(model_input=input_data)

mlflow.pyfunc.log_model(
    artifact_path="model",
    python_model=KedroPipelineModel(pipeline=pipeline_training, catalog=catalog),
    artifacts=artifacts,
    conda_env={"python": "3.10.0", dependencies: ["kedro==0.18.11"]},
    signature=model_signature,
)
```

It is also possible to pass arguments to `KedroPipelineModel` to specify the runner or the `copy_mode` of `MemoryDataset` for the inference Pipeline. This may be faster especially for compiled model (e.g keras, tensorflow...), and more suitable for an API serving pattern. Since `kedro-mlflow==0.12.0`, `copy_mode="assign"` has become the default.

```
KedroPipelineModel(pipeline=pipeline_training, catalog=catalog, copy_mode="assign")
```

Available `copy_mode` are `assign`, `copy` and `deepcopy`. It is possible to pass a dictionary to specify different copy mode for each dataset.

8.4 Cli commands

8.4.1 init

`kedro mlflow init`: this command is needed to initialize your project. You cannot run any other commands before you run this one once. It performs 2 actions: - creates a `mlflow.yml` configuration file in your `conf/local` folder - replace the `src/PYTHON_PACKAGE/run.py` file by an updated version of the template. If your template has been modified since project creation, a warning will be raised. You can either run `kedro mlflow init --force` to ignore this warning (but this will erase your `run.py`) or *set hooks manually*.

`init` has two arguments:

- `--env` which enable to specify another environment where the `mlflow.yml` should be created (e.g, `base`)
- `--force` which overrides the `mlflow.yml` if it already exists and replaces it with the default one. Use it with caution!

8.4.2 ui

`kedro mlflow ui`: this command opens the mlflow UI (basically launches the `mlflow ui` command)

`ui` accepts the port and host arguments of `mlflow ui` command. The default values used will be the ones defined in the *`mlflow.yml` configuration file under the `ui`*.

If you provide the arguments at runtime, they will take priority over the `mlflow.yml`, e.g. if you have:

```
# mlflow.yml
ui:
  localhost: "0.0.0.0"
  port: "5001"
```

then

```
kedro mlflow ui --port=5002
```

will open the ui on port 5002.

8.4.3 modelify

`kedro mlflow modelify`: this command converts a kedro pipeline to a mlflow model and logs it in mlflow. It enables distributing the kedro pipeline as a standalone model and leverages all mlflow serving capabilities (as an API).

`modelify` accepts the following arguments :

- `--pipeline, -p`: The name of the kedro pipeline name registered in `pipeline_registry.py` that you want to convert to a mlflow model.
- `--input-name, -i`: The name of the kedro dataset (in `catalog.yml`) which is the input of your pipeline. It contains the data to predict on.
- `--infer-signature`: A boolean which indicates if the signature of the input data should be inferred for mlflow or not.
- `--infer-input-example`: A boolean which indicates if the `input_example` of the input data should be inferred for mlflow or not

- `--run-id, -r` : The id of the mlflow run where the model will be logged. If unspecified, the command creates a new run.
- `--run-name`: The name of the mlflow run where the model will be logged. Defaults to "modelify".
- `--copy-mode` : The copy mode to use when replacing each dataset by a `MemoryDataset`. Either a string (applied all datasets) or a dict mapping each dataset to a `copy_mode`.
- `--artifact-path` : The artifact path of `mlflow.pyfunc.log_model`, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model
- `--code-path` : The code path of `mlflow.pyfunc.log_model`, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model
- `--conda-env` : "The conda environment of `mlflow.pyfunc.log_model`, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model
- `--registered-model-name` : The `registered_model_name` of `mlflow.pyfunc.log_model`, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model
- `--await-registration-for`: The `await_registration_for` of `mlflow.pyfunc.log_model`, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model*
- `--pip-requirements` : The `pip_requirements` of `mlflow.pyfunc.log_model`, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model
- `--extra-pip-requirements` : The `extra_pip_requirements` of `mlflow.pyfunc.log_model`, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

8.5 Configuration

The python object is `KedroMlflowConfig` and it can be filled through `mlflow.yml`.

More details are coming soon.

KEDRO_MLFLOW PACKAGE

9.1 Datasets

9.1.1 Artifact DataSet

```
class kedro_mlflow.io.artifacts.mlflow_artifact_dataset.MlflowArtifactDataset(dataset: str | Dict, run_id: str = None, artifact_path: str = None, credentials: Dict[str, Any] = None)
```

Bases: AbstractVersionedDataset

This class is a wrapper for any kedro AbstractDataset. It decorates their save method to log the dataset in mlflow when save is called.

9.1.2 Metrics DataSet

```
class kedro_mlflow.io.metrics.mlflow_metric_dataset.MlflowMetricDataset(key: str = None, run_id: str = None, load_args: Dict[str, Any] = None, save_args: Dict[str, Any] = None)
```

Bases: MlflowAbstractMetricDataset

DEFAULT_SAVE_MODE = 'overwrite'

SUPPORTED_SAVE_MODES = {'append', 'overwrite'}

__init__(key: str = None, run_id: str = None, load_args: Dict[str, Any] = None, save_args: Dict[str, Any] = None)

Initialise MlflowMetricDataset. :param run_id: The ID of the mlflow run where the metric should be logged
:type run_id: str

```
class kedro_mlflow.io.metrics.mlflow_metric_history_dataset.MlflowMetricHistoryDataset(key:
                                                                    str
                                                                    =
                                                                    None,
                                                                    run_id:
                                                                    str
                                                                    =
                                                                    None,
                                                                    load_args:
                                                                    Dict[str,
                                                                    Any]
                                                                    =
                                                                    None,
                                                                    save_args:
                                                                    Dict[str,
                                                                    Any]
                                                                    =
                                                                    None)
```

Bases: MlflowAbstractMetricDataset

```
__init__(key: str = None, run_id: str = None, load_args: Dict[str, Any] = None, save_args: Dict[str, Any]
          = None)
```

Initialise MlflowMetricDataset. :param run_id: The ID of the mlflow run where the metric should be logged
:type run_id: str

9.1.3 Models DataSet

```
class kedro_mlflow.io.models.mlflow_abstract_model_dataset.MlflowAbstractModelDataSet(filepath:
                                                                    str,
                                                                    fla-
                                                                    vor:
                                                                    str,
                                                                    py-
                                                                    func_workflow:
                                                                    str |
                                                                    None
                                                                    =
                                                                    None,
                                                                    load_args:
                                                                    Dict[str,
                                                                    Any]
                                                                    =
                                                                    None,
                                                                    save_args:
                                                                    Dict[str,
                                                                    Any]
                                                                    =
                                                                    None,
                                                                    ver-
                                                                    sion:
                                                                    Ver-
                                                                    sion
                                                                    =
                                                                    None)
```

Bases: `AbstractVersionedDataset`

Abstract mother class for model datasets.

__init__ (*filepath: str, flavor: str, pyfunc_workflow: str | None = None, load_args: Dict[str, Any] = None, save_args: Dict[str, Any] = None, version: Version = None*) → None

Initialize the Kedro MlflowAbstractModelDataSet.

Parameters are passed from the Data Catalog.

During save, the model is first logged to MLflow. During load, the model is pulled from MLflow run with *run_id*.

Parameters

- **filepath** (*str*) – Path to store the dataset locally.
- **flavor** (*str*) – Built-in or custom MLflow model flavor module. Must be Python-importable.
- **pyfunc_workflow** (*str, optional*) – Either *python_model* or *loader_module*. See https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#workflows.
- **load_args** (*Dict[str, Any], optional*) – Arguments to *load_model* function from specified *flavor*. Defaults to {}.
- **save_args** (*Dict[str, Any], optional*) – Arguments to *log_model* function from specified *flavor*. Defaults to {}.
- **version** (*Version, optional*) – Specific version to load.

Raises

DatasetError – When passed *flavor* does not exist.

```

class kedro_mlflow.io.models.mlflow_model_tracking_dataset.MlflowModelTrackingDataset(flavor:
    str,
    run_id:
    str |
    None
    =
    None,
    artifact_path:
    str |
    None
    =
    'model',
    pyfunc_workflow:
    str |
    None
    =
    None,
    load_args:
    Dict[str,
    Any]
    |
    None
    =
    None,
    save_args:
    Dict[str,
    Any]
    |
    None
    =
    None)

```

Bases: [MlflowAbstractModelDataSet](#)

Wrapper for saving, logging and loading for all MLflow model flavor.

```

__init__(flavor: str, run_id: str | None = None, artifact_path: str | None = 'model', pyfunc_workflow: str |
    None = None, load_args: Dict[str, Any] | None = None, save_args: Dict[str, Any] | None = None)
    → None

```

Initialize the Kedro MlflowModelDataSet.

Parameters are passed from the Data Catalog.

During save, the model is first logged to MLflow. During load, the model is pulled from MLflow run with *run_id*.

Parameters

- **flavor** (*str*) – Built-in or custom MLflow model flavor module. Must be Python-importable.
- **run_id** (*Optional[str]*, *optional*) – MLflow run ID to use to load the model from or save the model to. Defaults to None.
- **artifact_path** (*str*, *optional*) – the run relative path to the model.

- **pyfunc_workflow** (*str*, *optional*) – Either *python_model* or *loader_module*. See https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#workflows.
- **load_args** (*Dict[str, Any]*, *optional*) – Arguments to *load_model* function from specified *flavor*. Defaults to *None*.
- **save_args** (*Dict[str, Any]*, *optional*) – Arguments to *log_model* function from specified *flavor*. Defaults to *None*.

Raises

DatasetError – When passed *flavor* does not exist.

property `model_uri`

```
class kedro_mlflow.io.models.mlflow_model_local_filesystem_dataset.MlflowModelLocalFileSystemDataset(file
    str
    fla-
    vor
    str
    py-
    fun
    str
    |
    No
    =
    No
    loa
    Di
    An
    =
    No
    sav
    Di
    An
    =
    No
    log
    Di
    An
    =
    No
    ver
    sio
    Ver
    sio
    =
    No
```

Bases: *MlflowAbstractModelDataSet*

Wrapper for saving, logging and loading for all MLflow model flavor.

```
__init__(filepath: str, flavor: str, pyfunc_workflow: str | None = None, load_args: Dict[str, Any] = None,
        save_args: Dict[str, Any] = None, log_args: Dict[str, Any] = None, version: Version = None) →
        None
```

Initialize the Kedro MlflowModelDataSet.

Parameters are passed from the Data Catalog.

During save, the model is saved locally at *filepath* During load, the model is loaded from the local *filepath*.

Parameters

- **flavor** (*str*) – Built-in or custom MLflow model flavor module. Must be Python-importable.
- **filepath** (*str*) – Path to store the dataset locally.
- **pyfunc_workflow** (*str*, *optional*) – Either *python_model* or *loader_module*. See https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#workflows.
- **load_args** (*Dict[str, Any]*, *optional*) – Arguments to *load_model* function from specified *flavor*. Defaults to None.
- **save_args** (*Dict[str, Any]*, *optional*) – Arguments to *save_model* function from specified *flavor*. Defaults to None.
- **version** (*Version*, *optional*) – Kedro version to use. Defaults to None.

Raises

DatasetError – When passed *flavor* does not exist.

```
class kedro_mlflow.io.models.mlflow_model_registry_dataset.MlflowModelRegistryDataset(model_name:
    str,
    stage_or_version:
    str |
    int
    =
    'latest',
    flavor:
    str |
    None
    =
    'mlflow.pyfunc',
    pyfunc_workflow:
    str |
    None
    =
    'python_model',
    load_args:
    Dict[str,
    Any]
    |
    None
    =
    None)
```

Bases: *MlflowAbstractModelDataSet*

Wrapper for saving, logging and loading for all MLflow model flavor.

```
__init__(model_name: str, stage_or_version: str | int = 'latest', flavor: str | None = 'mlflow.pyfunc',
    pyfunc_workflow: str | None = 'python_model', load_args: Dict[str, Any] | None = None) → None
```

Initialize the Kedro MlflowModelRegistryDataset.

Parameters are passed from the Data Catalog.

During “load”, the model is pulled from MLflow model registry by its name. “save” is not supported.

Parameters

- **model_name** (*str*) – The name of the registered model is the mlflow registry
- **stage_or_version** (*str*) – A valid stage (either “staging” or “production”) or version number for the registered model. Default to “latest” which fetch the last version and the higher “stage” available.
- **flavor** (*str*) – Built-in or custom MLflow model flavor module. Must be Python-importable.
- **pyfunc_workflow** (*str, optional*) – Either *python_model* or *loader_module*. See https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#workflows.
- **load_args** (*Dict[str, Any], optional*) – Arguments to *load_model* function from specified *flavor*. Defaults to None.

Raises

DatasetError – When passed *flavor* does not exist.

9.2 CLI

9.2.1 init

Updates the template of a kedro project. Running this command is mandatory to use kedro-mlflow. This adds “conf/base/mlflow.yml”: This is a configuration file used for run parametrization when calling “kedro run” command.

```
init [OPTIONS]
```

Options

-e, --env <env>

The name of the kedro environment where the ‘mlflow.yml’ should be created. Default to ‘local’

-f, --force

Update the template without any checks.

-s, --silent

Should message be logged when files are modified?

9.2.2 ui

Opens the mlflow user interface with the project-specific settings of mlflow.yml. This interface enables to browse and compares runs.

```
ui [OPTIONS]
```

Options

-e, --env <env>

The environment within conf folder we want to retrieve.

-p, --port <port>

The port to listen on

-h, --host <host>

The network address to listen on (default: 127.0.0.1). Use 0.0.0.0 to bind to all addresses if you want to access the tracking server from other machines.

9.2.3 modelify

Export a kedro pipeline as a mlflow model for serving

```
modelify [OPTIONS]
```

Options

-p, --pipeline <pipeline_name>

Required A valid kedro pipeline name registered in pipeline_registry.py. Available pipelines can be listed with in 'kedro registry list'

-i, --input-name <input_name>

Required The name of kedro dataset which contains the data to predict on

--infer-signature

Should the signature of the input data be inferred for mlflow?

--infer-input-example

Should the input_example of the input data be inferred for mlflow?

-r, --run-id <run_id>

The id of the mlflow run where the model will be logged. If unspecified, the command creates a new run.

--run-name <run_name>

The name of the mlflow run where the model will be logged. Defaults to 'modelify'.

--copy-mode <copy_mode>

The copy mode to use when replacing each dataset by a MemoryDataset. Either a string (applied all datasets) or a dict mapping each dataset to a copy_mode.

--artifact-path <artifact_path>

The artifact path of mlflow.pyfunc.log_model, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

--code-path <code_path>

The code path of mlflow.pyfunc.log_model, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

--conda-env <conda_env>

The conda environment of mlflow.pyfunc.log_model, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

--registered-model-name <registered_model_name>
 The registered_model_name of mlflow.pyfunc.log_model, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

--await-registration-for <await_registration_for>
 The await_registration_for of mlflow.pyfunc.log_model, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

--pip-requirements <pip_requirements>
 The pip_requirements of mlflow.pyfunc.log_model, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

--extra-pip-requirements <extra_pip_requirements>
 The extra_pip_requirements of mlflow.pyfunc.log_model, see https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

9.3 Pipelines

exception kedro_mlflow.pipeline.pipeline_ml.KedroMlflowPipelineMLError

Bases: Exception

Error raised when the KedroPipelineModel construction fails

class kedro_mlflow.pipeline.pipeline_ml.PipelineML(*nodes: Iterable[Node | Pipeline], *args, tags: str | Iterable[str] | None = None, inference: Pipeline, input_name: str, kpm_kwargs: Dict[str, str] | None = None, log_model_kwargs: Dict[str, str] | None = None*)

Bases: Pipeline

IMPORTANT NOTE: THIS CLASS IS NOT INTENDED TO BE USED DIRECTLY IN A KEDRO PROJECT. YOU SHOULD USE `pipeline_ml_factory` FUNCTION FOR MODULAR PIPELINE WHICH IS MORE FLEXIBLE AND USER FRIENDLY. SEE `INSERT_DOC_URL`

A PipelineML is a kedro Pipeline which we assume is a “training” (in the machine learning way) pipeline. Basically, “training” is a higher order function (it generates another function). It implies that: - the outputs of this pipeline are considered as “fitted models”, i.e. inputs of another inference pipeline (it is very likely that there are several outputs because we need to store any object that depends on the train data (e.g encoders, binarizers, vectorizer, machine learning models...)) - These outputs will feed another “inference” pipeline (to be used for prediction purpose) whose inputs

are the outputs of the “training” pipeline, except for one of them (the new data to predict).

This class enables to “link” a training pipeline and an inference pipeline in order to package them in mlflow easily. The goal is to call the `MlflowHook` hook after a PipelineML is called in order to trigger mlflow packaging.

KPM_KWARGS_DEFAULT = {}

LOG_MODEL_KWARGS_DEFAULT = {'artifact_path': 'model', 'signature': 'auto'}

__init__(*nodes: Iterable[Node | Pipeline], *args, tags: str | Iterable[str] | None = None, inference: Pipeline, input_name: str, kpm_kwargs: Dict[str, str] | None = None, log_model_kwargs: Dict[str, str] | None = None*)

Store all necessary information for calling `mlflow.log_model` in the pipeline.

Parameters

- **nodes** (*Iterable[Union[Node, Pipeline]]*) – The `node`s` of the training pipeline.
- **tags** (*Union[str, Iterable[str]], optional*) – Optional set of tags to be applied to all the pipeline nodes. Defaults to None.
- **inference** (*Pipeline*) – A *Pipeline* object which will be stored in mlflow and use the output(s) of the training pipeline (namely, the model) to predict the outcome.
- **input_name** (*str, optional*) – The name of the dataset in the catalog.yml which the model's user must provide for prediction (i.e. the data). Defaults to None.
- **kpm_kwargs** – extra arguments to be passed to *KedroPipelineModel* when the PipelineML object is automatically saved at the end of a run. This includes:
 - *copy_mode*: the *copy_mode* to be used for underlying dataset
 - when loaded in memory - *runner*: the kedro runner to run the model with
- **log_model_kwargs** –
extra arguments to be passed to *mlflow.pyfunc.log_model*, e.g.:
 - "signature" accepts an extra "auto" which automatically infer the signature based on "input_name" dataset

filter(*tags: Iterable[str] = None, from_nodes: Iterable[str] = None, to_nodes: Iterable[str] = None, node_names: Iterable[str] = None, from_inputs: Iterable[str] = None, to_outputs: Iterable[str] = None, node_namespace: str = None*) → Pipeline

Creates a new Pipeline object with the nodes that meet all of the specified filtering conditions.

The new pipeline object is the intersection of pipelines that meet each filtering condition. This is distinct from chaining multiple filters together.

Parameters

- **tags** – A list of node tags which should be used to lookup the nodes of the new Pipeline.
- **from_nodes** – A list of node names which should be used as a starting point of the new Pipeline.
- **to_nodes** – A list of node names which should be used as an end point of the new Pipeline.
- **node_names** – A list of node names which should be selected for the new Pipeline.
- **from_inputs** – A list of inputs which should be used as a starting point of the new Pipeline
- **to_outputs** – A list of outputs which should be the final outputs of the new Pipeline.
- **node_namespace** – One node namespace which should be used to select nodes in the new Pipeline.

Returns

A new Pipeline object with nodes that meet all of the specified filtering conditions.

Raises

ValueError – The filtered Pipeline has no nodes.

Example:

```
>>> pipeline = Pipeline(
>>>     [
>>>         node(func, "A", "B", name="node1"),
>>>         node(func, "B", "C", name="node2"),
>>>         node(func, "C", "D", name="node3"),
>>>     ]
>>> )
>>> pipeline.filter(node_names=["node1", "node3"], from_inputs=["A"])
>>> # Gives a new pipeline object containing node1 and node3.
```

from_inputs(*inputs: str) → PipelineML

Create a new Pipeline object with the nodes which depend directly or transitively on the provided inputs. If provided a name, but no format, for a transcoded input, it includes all the nodes that use inputs with that name, otherwise it matches to the fully-qualified name only (i.e. `name@format`).

Parameters

***inputs** – A list of inputs which should be used as a starting point of the new Pipeline

Raises

ValueError – Raised when any of the given inputs do not exist in the Pipeline object.

Returns

A new Pipeline object, containing a subset of the
nodes of the current one such that only nodes depending directly or transitively on the provided inputs are being copied.

from_nodes(*node_names: str) → PipelineML

Create a new Pipeline object with the nodes which depend directly or transitively on the provided nodes.

Parameters

***node_names** – A list of node_names which should be used as a starting point of the new Pipeline.

Raises

ValueError – Raised when any of the given names do not exist in the Pipeline object.

Returns

A new Pipeline object, containing a subset of the nodes of
the current one such that only nodes depending directly or transitively on the provided nodes are being copied.

property inference: str

property input_name: str

only_nodes(*node_names: str) → Pipeline

Create a new Pipeline which will contain only the specified nodes by name.

Parameters

***node_names** – One or more node names. The returned Pipeline will only contain these nodes.

Raises

ValueError – When some invalid node name is given.

Returns

A new Pipeline, containing only nodes.

only_nodes_with_inputs(*inputs: str) → *PipelineML*

Create a new Pipeline object with the nodes which depend directly on the provided inputs. If provided a name, but no format, for a transcoded input, it includes all the nodes that use inputs with that name, otherwise it matches to the fully-qualified name only (i.e. `name@format`).

Parameters

***inputs** – A list of inputs which should be used as a starting point of the new Pipeline.

Raises

ValueError – Raised when any of the given inputs do not exist in the Pipeline object.

Returns

A new Pipeline object, containing a subset of the
nodes of the current one such that only nodes depending directly on the provided inputs are being copied.

only_nodes_with_namespace(node_namespace: str) → Pipeline

Creates a new Pipeline containing only nodes with the specified namespace.

Parameters

node_namespace – One node namespace.

Raises

ValueError – When pipeline contains no nodes with the specified namespace.

Returns

A new Pipeline containing nodes with the specified namespace.

only_nodes_with_outputs(*outputs: str) → *PipelineML*

Create a new Pipeline object with the nodes which are directly required to produce the provided outputs. If provided a name, but no format, for a transcoded dataset, it includes all the nodes that output to that name, otherwise it matches to the fully-qualified name only (i.e. `name@format`).

Parameters

***outputs** – A list of outputs which should be the final outputs of the new Pipeline.

Raises

ValueError – Raised when any of the given outputs do not exist in the Pipeline object.

Returns

A new Pipeline object, containing a subset of the nodes of the current one such that only nodes which are directly required to produce the provided outputs are being copied.

only_nodes_with_tags(*tags: str) → *PipelineML*

Creates a new Pipeline object with the nodes which contain *any* of the provided tags. The resulting Pipeline is empty if no tags are provided.

Parameters

***tags** – A list of node tags which should be used to lookup the nodes of the new Pipeline.

Returns

A new Pipeline object, containing a subset of the
nodes of the current one such that only nodes containing *any* of the tags provided are being copied.

Return type

Pipeline

tag(tags: str | Iterable[str]) → *PipelineML*

Tags all the nodes in the pipeline.

Parameters

tags – The tags to be added to the nodes.

Returns

New Pipeline object with nodes tagged.

to_nodes(*node_names: str) → *PipelineML*

Create a new Pipeline object with the nodes required directly or transitively by the provided nodes.

Parameters

***node_names** – A list of node_names which should be used as an end point of the new Pipeline.

Raises

ValueError – Raised when any of the given names do not exist in the Pipeline object.

Returns

A new Pipeline object, containing a subset of the nodes of the
current one such that only nodes required directly or transitively by the provided nodes are being copied.

to_outputs(*outputs: str) → *PipelineML*

Create a new Pipeline object with the nodes which are directly or transitively required to produce the provided outputs. If provided a name, but no format, for a transcoded dataset, it includes all the nodes that output to that name, otherwise it matches to the fully-qualified name only (i.e. *name@format*).

Parameters

***outputs** – A list of outputs which should be the final outputs of the new Pipeline.

Raises

ValueError – Raised when any of the given outputs do not exist in the Pipeline object.

Returns

A new Pipeline object, containing a subset of the nodes of the current one such that only nodes which are directly or transitively required to produce the provided outputs are being copied.

property training: Pipeline

kedro_mlflow.pipeline.pipeline_ml_factory.**pipeline_ml_factory**(training: Pipeline, inference: Pipeline, input_name: str = None, kpm_kwargs=None, log_model_kwargs=None) → *PipelineML*

This function is a helper to create *PipelineML* object directly from two Kedro *Pipelines* (one of training and one of inference) .

Parameters

- **training** (*Pipeline*) – The *Pipeline* object that creates all mlflow artifacts for prediction (the model, but also encoders, binarizers, tokenizers...). These artifacts must be persisted in the catalog.yml.
- **inference** (*Pipeline*) – A *Pipeline* object which will be stored in mlflow and use the output(s) of the training pipeline (namely, the model) to predict the outcome.

- **input_name** (*str, optional*) – The name of the dataset in the catalog.yml which the model's user must provide for prediction (i.e. the data). Defaults to None.
- **kpm_kwargs** – extra arguments to be passed to *KedroPipelineModel* when the PipelineML object is automatically saved at the end of a run. This includes:
 - *copy_mode*: the copy_mode to be used for underlying dataset when loaded in memory
 - *runner*: the kedro runner to run the model with
- **logging_kwargs** – extra arguments to be passed to *mlflow.pyfunc.log_model* when the PipelineML object is automatically saved at the end of a run. See mlflow documentation to see all available options: https://www.mlflow.org/docs/latest/python_api/mlflow.pyfunc.html#mlflow.pyfunc.log_model

Returns

A *PipelineML* which is automatically

discovered by the *MlflowHook* and contains all the information for logging the inference pipeline as a Mlflow Model.

Return type

PipelineML

9.4 Custom Mlflow Models

```
class kedro_mlflow.mlflow.kedro_pipeline_model.KedroPipelineModel(pipeline: Pipeline, catalog:
                                                                    DataCatalog, input_name:
                                                                    str, runner: AbstractRunner |
                                                                    None = None, copy_mode:
                                                                    Dict[str, str] | str | None =
                                                                    'assign')
```

Bases: PythonModel

```
__init__(pipeline: Pipeline, catalog: DataCatalog, input_name: str, runner: AbstractRunner | None =
        None, copy_mode: Dict[str, str] | str | None = 'assign')
```

[summary]

Parameters

- **pipeline** (*Pipeline*) – A Kedro Pipeline object to
- **objects.** (*store as a Mlflow Model. Also works with kedro_mlflow PipelineML*)
- **catalog** (*The copy_mode of each DataSet of the*) – The DataCatalog associated
- **PipelineMl** (*to the*)
- **runner** (*Optional[AbstractRunner], optional*) – The kedro
- **if** (*AbstractRunner to use. Defaults to SequentialRunner*)
- **None.**
- **copy_mode** (*Optional[Union[Dict[str, str], str]]*)
- **catalog**
- **memory.** (*when reconstructing the DataCatalog in*)

- **"assign"**. (The default is)
 - **either** (You can pass) –
 - None to use Kedro default mode for each dataset
 - a single string ("deepcopy", "copy" and "assign")
- to apply to all datasets - a dictionary with (dataset name, copy_mode) key/values pairs. The associated mode must be a valid kedro mode ("deepcopy", "copy" and "assign") for each. Defaults to None.

property `copy_mode`

extract_pipeline_artifacts(*parameters_saving_folder: Path | None = None*)

load_context(*context*)

Loads artifacts from the specified `PythonModelContext` that can be used by `predict()` when evaluating inputs. When loading an MLflow model with `load_model()`, this method is called as soon as the `PythonModel` is constructed.

The same `PythonModelContext` will also be available during calls to `predict()`, but it may be more efficient to override this method and load artifacts from the context at model load time.

Parameters

- **context** – A `PythonModelContext` instance containing artifacts that the model can use to perform inference.

predict(*context, model_input*)

Evaluates a pyfunc-compatible input and produces a pyfunc-compatible output. For more information about the pyfunc input/output API, see the [pyfunc-inference-api](#).

Parameters

- **context** – A `PythonModelContext` instance containing artifacts that the model can use to perform inference.
- **model_input** – A pyfunc-compatible input for the model to evaluate.
- **params** – Additional parameters to pass to the model for inference.

Note: Experimental: This parameter may change or be removed in a future release without warning.

exception `kedro_mlflow.mlflow.kedro_pipeline_model.KedroPipelineModelError`

Bases: `Exception`

Error raised when the `KedroPipelineModel` construction fails

9.5 Configuration

```
class kedro_mlflow.config.kedro_mlflow_config.DictParamsOptions(*, flatten: bool = False,
                                                                recursive: bool = True, sep: str
                                                                = '.')
```

Bases: BaseModel

```
class Config
```

Bases: object

```
extra = 'forbid'
```

```
flatten: bool
```

```
model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}
```

A dictionary of computed field names and their corresponding *ComputedFieldInfo* objects.

```
model_config: ClassVar[ConfigDict] = {'extra': 'forbid'}
```

Configuration for the model, should be a dictionary conforming to *[ConfigDict][pydantic.config.ConfigDict]*.

```
model_fields: ClassVar[dict[str, FieldInfo]] = {'flatten':
FieldInfo(annotation=bool, required=False, default=False,
metadata=[Strict(strict=True)]), 'recursive': FieldInfo(annotation=bool,
required=False, default=True, metadata=[Strict(strict=True)]), 'sep':
FieldInfo(annotation=str, required=False, default='.')}
```

Metadata about the fields defined on the model, mapping of field names to *[FieldInfo][pydantic.fields.FieldInfo]*.

This replaces *Model.__fields__* from Pydantic V1.

```
recursive: bool
```

```
sep: str
```

```
class kedro_mlflow.config.kedro_mlflow_config.DisableTrackingOptions(*, pipelines: List[str] =
                                                                    [])
```

Bases: BaseModel

```
class Config
```

Bases: object

```
extra = 'forbid'
```

```
model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}
```

A dictionary of computed field names and their corresponding *ComputedFieldInfo* objects.

```
model_config: ClassVar[ConfigDict] = {'extra': 'forbid'}
```

Configuration for the model, should be a dictionary conforming to *[ConfigDict][pydantic.config.ConfigDict]*.

```
model_fields: ClassVar[dict[str, FieldInfo]] = {'pipelines':
FieldInfo(annotation=List[str], required=False, default=[])}
```

Metadata about the fields defined on the model, mapping of field names to *[FieldInfo][pydantic.fields.FieldInfo]*.

This replaces *Model.__fields__* from Pydantic V1.

pipelines: List[str]

```
class kedro_mlflow.config.kedro_mlflow_config.ExperimentOptions(*name: str = 'Default',
                                                             restore_if_deleted: bool = True)
```

Bases: BaseModel

class Config

Bases: object

extra = 'forbid'

model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}

A dictionary of computed field names and their corresponding *ComputedFieldInfo* objects.

model_config: ClassVar[ConfigDict] = {'extra': 'forbid'}

Configuration for the model, should be a dictionary conforming to [ConfigDict][pydantic.config.ConfigDict].

model_fields: ClassVar[dict[str, FieldInfo]] = {'name': FieldInfo(annotation=str, required=False, default='Default'), 'restore_if_deleted': FieldInfo(annotation=bool, required=False, default=True, metadata=[Strict(strict=True)])}

Metadata about the fields defined on the model, mapping of field names to [FieldInfo][pydantic.fields.FieldInfo].

This replaces *Model.__fields__* from Pydantic V1.

model_post_init(__context: Any) → None

This function is meant to behave like a BaseModel method to initialise private attributes.

It takes context as an argument since that's what pydantic-core passes when calling it.

Parameters

- **self** – The BaseModel instance.
- **__context** – The context.

name: str

restore_if_deleted: bool

```

class kedro_mlflow.config.kedro_mlflow_config.KedroMlflowConfig(*, server: MlflowServerOptions
                                                                = MlflowServerOptions(
                                                                    mlflow_tracking_uri=None,
                                                                    mlflow_registry_uri=None,
                                                                    credentials=None, request_header_provider=RequestHeaderProviderOptions(
                                                                    pass_context=False,
                                                                    init_kwargs={}), tracking:
                                                                    MlflowTrackingOptions =
                                                                    MlflowTrackingOptions(
                                                                    disable_tracking=DisableTrackingOptions(
                                                                    pipelines=[],
                                                                    experiment=ExperimentOptions(
                                                                    name='Default',
                                                                    restore_if_deleted=True),
                                                                    run=RunOptions(
                                                                    id=None,
                                                                    name=None,
                                                                    nested=True),
                                                                    params=MlflowParamsOptions(
                                                                    dict_params=DictParamsOptions(
                                                                    flatten=False,
                                                                    recursive=True,
                                                                    sep='.'),
                                                                    long_params_strategy='fail')),
                                                                    ui: UiOptions =
                                                                    UiOptions(
                                                                    port='5000',
                                                                    host='127.0.0.1'))

```

Bases: BaseModel

class Config

Bases: object

extra = 'forbid'

validate_assignment = True

model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}

A dictionary of computed field names and their corresponding *ComputedFieldInfo* objects.

model_config: ClassVar[ConfigDict] = {'extra': 'forbid', 'validate_assignment': True}

Configuration for the model, should be a dictionary conforming to [ConfigDict][pydantic.config.ConfigDict].

model_fields: ClassVar[dict[str, FieldInfo]] = {'server': FieldInfo(annotation=MlflowServerOptions, required=False, default=MlflowServerOptions(mlflow_tracking_uri=None, mlflow_registry_uri=None, credentials=None, request_header_provider=RequestHeaderProviderOptions(type=None, pass_context=False, init_kwargs={}))), 'tracking': FieldInfo(annotation=MlflowTrackingOptions, required=False, default=MlflowTrackingOptions(disable_tracking=DisableTrackingOptions(pipelines=[]), experiment=ExperimentOptions(name='Default', restore_if_deleted=True), run=RunOptions(id=None, name=None, nested=True), params=MlflowParamsOptions(dict_params=DictParamsOptions(flatten=False, recursive=True, sep='.'), long_params_strategy='fail'))), 'ui': FieldInfo(annotation=UiOptions, required=False, default=UiOptions(port='5000', host='127.0.0.1'))}

Metadata about the fields defined on the model, mapping of field names to [FieldInfo][pydantic.fields.FieldInfo].

This replaces *Model.__fields__* from Pydantic V1.

```

server: MlflowServerOptions

setup(context)
    Setup all the mlflow configuration

tracking: MlflowTrackingOptions

ui: UiOptions

class kedro_mlflow.config.kedro_mlflow_config.MlflowParamsOptions(*, dict_params:
    DictParamsOptions = DictParamsOptions(flatten=False, recursive=True, sep='.'),
    long_params_strategy: Literal['fail', 'truncate', 'tag'] = 'fail')

Bases: BaseModel

class Config
    Bases: object

    extra = 'forbid'

dict_params: DictParamsOptions

long_params_strategy: Literal['fail', 'truncate', 'tag']

model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}
    A dictionary of computed field names and their corresponding ComputedFieldInfo objects.

model_config: ClassVar[ConfigDict] = {'extra': 'forbid'}
    Configuration for the model, should be a dictionary conforming to [ConfigDict][pydantic.config.ConfigDict].

model_fields: ClassVar[dict[str, FieldInfo]] = {'dict_params':
    FieldInfo(annotation=DictParamsOptions, required=False,
    default=DictParamsOptions(flatten=False, recursive=True, sep='.')),
    'long_params_strategy': FieldInfo(annotation=Literal['fail', 'truncate', 'tag'],
    required=False, default='fail')}
    Metadata about the fields defined on the model, mapping of field names to [FieldInfo][pydantic.fields.FieldInfo].

    This replaces Model.__fields__ from Pydantic V1.

class kedro_mlflow.config.kedro_mlflow_config.MlflowServerOptions(*, mlflow_tracking_uri: str |
    None = None,
    mlflow_registry_uri: str |
    None = None, credentials: str
    | None = None,
    request_header_provider: RequestHeaderProviderOptions
    = RequestHeaderProviderOptions(type=None,
    pass_context=False,
    init_kwargs={}))

Bases: BaseModel

```

```
class Config
    Bases: object
    extra = 'forbid'

credentials: str | None

mlflow_registry_uri: str | None

mlflow_tracking_uri: str | None

model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}
    A dictionary of computed field names and their corresponding ComputedFieldInfo objects.

model_config: ClassVar[ConfigDict] = {'extra': 'forbid'}
    Configuration for the model, should be a dictionary conforming to [ConfigDict][pydantic.config.ConfigDict].

model_fields: ClassVar[dict[str, FieldInfo]] = {'credentials':
FieldInfo(annotation=Union[str, NoneType], required=False, default=None),
'mlflow_registry_uri': FieldInfo(annotation=Union[str, NoneType], required=False,
default=None), 'mlflow_tracking_uri': FieldInfo(annotation=Union[str, NoneType],
required=False, default=None), 'request_header_provider':
FieldInfo(annotation=RequestHeaderProviderOptions, required=False,
default=RequestHeaderProviderOptions(type=None, pass_context=False,
init_kwargs={})))}
    Metadata about the fields defined on the model, mapping of field names to [FieldInfo][pydantic.fields.FieldInfo].
    This replaces Model.__fields__ from Pydantic V1.

model_post_init(__context: Any) → None
    This function is meant to behave like a BaseModel method to initialise private attributes.
    It takes context as an argument since that's what pydantic-core passes when calling it.

    Parameters
    • self – The BaseModel instance.
    • __context – The context.

request_header_provider: RequestHeaderProviderOptions
```

```

class kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions(*, disable_tracking:
    DisableTrackingOptions =
    DisableTrackingOptions(pipelines=[]),
    experiment:
    ExperimentOptions =
    ExperimentOptions(name='Default',
        restore_if_deleted=True),
    run: RunOptions =
    RunOptions(id=None,
        name=None, nested=True),
    params:
    MlflowParamsOptions =
    MlflowParamsOptions(dict_params=DictParamsOptions(flatten=True,
        recursive=True, sep='.'),
        long_params_strategy='fail'))

Bases: BaseModel

class Config
    Bases: object
    extra = 'forbid'

disable_tracking: DisableTrackingOptions

experiment: ExperimentOptions

model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}
    A dictionary of computed field names and their corresponding ComputedFieldInfo objects.

model_config: ClassVar[ConfigDict] = {'extra': 'forbid'}
    Configuration for the model, should be a dictionary conforming to [ConfigDict][pydantic.config.ConfigDict].

model_fields: ClassVar[dict[str, FieldInfo]] = {'disable_tracking':
    FieldInfo(annotation=DisableTrackingOptions, required=False,
    default=DisableTrackingOptions(pipelines=[])), 'experiment':
    FieldInfo(annotation=ExperimentOptions, required=False,
    default=ExperimentOptions(name='Default', restore_if_deleted=True)), 'params':
    FieldInfo(annotation=MlflowParamsOptions, required=False,
    default=MlflowParamsOptions(dict_params=DictParamsOptions(flatten=False,
    recursive=True, sep='.'), long_params_strategy='fail')), 'run':
    FieldInfo(annotation=RunOptions, required=False, default=RunOptions(id=None,
    name=None, nested=True))}
    Metadata about the fields defined on the model, mapping of field names to [FieldInfo][pydantic.fields.FieldInfo].

    This replaces Model.__fields__ from Pydantic V1.

params: MlflowParamsOptions

run: RunOptions

```

```
class kedro_mlflow.config.kedro_mlflow_config.RequestHeaderProviderOptions(*, type: str | None
                                                                           = None,
                                                                           pass_context: bool
                                                                           = False,
                                                                           init_kwargs:
                                                                           Dict[str, str] = {})

Bases: BaseModel

class Config
    Bases: object

    arbitrary_types_allowed = 'allowed'

    extra = 'forbid'

    init_kwargs: Dict[str, str]

    model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}
        A dictionary of computed field names and their corresponding ComputedFieldInfo objects.

    model_config: ClassVar[ConfigDict] = {'arbitrary_types_allowed': 'allowed',
    'extra': 'forbid'}
        Configuration for the model, should be a dictionary conforming to [Config-
        Dict][pydantic.config.ConfigDict].

    model_fields: ClassVar[dict[str, FieldInfo]] = {'init_kwargs':
    FieldInfo(annotation=Dict[str, str], required=False, default={}), 'pass_context':
    FieldInfo(annotation=bool, required=False, default=False), 'type':
    FieldInfo(annotation=Union[str, NoneType], required=False, default=None)}
        Metadata about the fields defined on the model, mapping of field names to [Field-
        Info][pydantic.fields.FieldInfo].

        This replaces Model.__fields__ from Pydantic V1.

    pass_context: bool

    type: str | None

class kedro_mlflow.config.kedro_mlflow_config.RunOptions(*, id: str | None = None, name: str | None
                                                         = None, nested: bool = True)

Bases: BaseModel

class Config
    Bases: object

    extra = 'forbid'

    id: str | None

    model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}
        A dictionary of computed field names and their corresponding ComputedFieldInfo objects.

    model_config: ClassVar[ConfigDict] = {'extra': 'forbid'}
        Configuration for the model, should be a dictionary conforming to [Config-
        Dict][pydantic.config.ConfigDict].
```

```
model_fields: ClassVar[dict[str, FieldInfo]] = {'id':
FieldInfo(annotation=Union[str, NoneType], required=False, default=None), 'name':
FieldInfo(annotation=Union[str, NoneType], required=False, default=None), 'nested':
FieldInfo(annotation=bool, required=False, default=True,
metadata=[Strict(strict=True)])}
```

Metadata about the fields defined on the model, mapping of field names to *[FieldInfo][pydantic.fields.FieldInfo]*.

This replaces *Model.__fields__* from Pydantic V1.

```
name: str | None
```

```
nested: bool
```

```
class kedro_mlflow.config.kedro_mlflow_config.UiOptions(*, port: str = '5000', host: str =
'127.0.0.1')
```

Bases: BaseModel

```
class Config
```

Bases: object

```
extra = 'forbid'
```

```
host: str
```

```
model_computed_fields: ClassVar[dict[str, ComputedFieldInfo]] = {}
```

A dictionary of computed field names and their corresponding *ComputedFieldInfo* objects.

```
model_config: ClassVar[ConfigDict] = {'extra': 'forbid'}
```

Configuration for the model, should be a dictionary conforming to *[ConfigDict][pydantic.config.ConfigDict]*.

```
model_fields: ClassVar[dict[str, FieldInfo]] = {'host': FieldInfo(annotation=str,
required=False, default='127.0.0.1'), 'port': FieldInfo(annotation=str,
required=False, default='5000')}
```

Metadata about the fields defined on the model, mapping of field names to *[FieldInfo][pydantic.fields.FieldInfo]*.

This replaces *Model.__fields__* from Pydantic V1.

```
port: str
```

9.6 Notebook

9.7 Hooks

9.7.1 Node Hook

9.7.2 Pipeline Hook

INDICES AND TABLES

- `genindex`
- `modindex`
- `search`

PYTHON MODULE INDEX

k

`kedro_mlflow.config.kedro_mlflow_config`, [86](#)
`kedro_mlflow.io.artifacts.mlflow_artifact_dataset`,
 [71](#)
`kedro_mlflow.io.metrics.mlflow_metric_dataset`,
 [71](#)
`kedro_mlflow.io.metrics.mlflow_metric_history_dataset`,
 [71](#)
`kedro_mlflow.io.models.mlflow_abstract_model_dataset`,
 [72](#)
`kedro_mlflow.io.models.mlflow_model_local_filesystem_dataset`,
 [75](#)
`kedro_mlflow.io.models.mlflow_model_registry_dataset`,
 [76](#)
`kedro_mlflow.io.models.mlflow_model_tracking_dataset`,
 [73](#)
`kedro_mlflow.mlflow.kedro_pipeline_model`, [84](#)
`kedro_mlflow.pipeline.pipeline_ml`, [79](#)
`kedro_mlflow.pipeline.pipeline_ml_factory`, [83](#)

Symbols

<code>__init__()</code> (<i>kedro_mlflow.io.metrics.mlflow_metric_dataset.MlflowMetricDataset</i> method), 71	<code>--pip-requirements</code> modelify command line option, 79
<code>__init__()</code> (<i>kedro_mlflow.io.metrics.mlflow_metric_history_dataset.MlflowMetricHistoryDataset</i> method), 72	<code>--pipeline</code> modelify command line option, 78
<code>__init__()</code> (<i>kedro_mlflow.io.models.mlflow_abstract_model_dataset.MlflowAbstractModelDataSet</i> method), 73	<code>--port</code> ui command line option, 78
<code>__init__()</code> (<i>kedro_mlflow.io.models.mlflow_model_local_filesystem_dataset.MlflowModelLocalFileSystemDataset</i> method), 75	<code>--registered-model-name</code> modelify command line option, 78
<code>__init__()</code> (<i>kedro_mlflow.io.models.mlflow_model_registry_dataset.MlflowModelRegistryDataset</i> method), 76	<code>--run-id</code> modelify command line option, 78
<code>__init__()</code> (<i>kedro_mlflow.io.models.mlflow_model_tracking_dataset.MlflowModelTrackingDataset</i> method), 74	<code>--run-name</code> modelify command line option, 78
<code>__init__()</code> (<i>kedro_mlflow.mlflow.kedro_pipeline_model.KedroPipelineModel</i> method), 84	<code>--silent</code> init command line option, 77
<code>__init__()</code> (<i>kedro_mlflow.pipeline.pipeline_ml.PipelineML</i> method), 79	<code>-e</code> init command line option, 77
<code>--artifact-path</code> modelify command line option, 78	<code>-f</code> ui command line option, 78
<code>--await-registration-for</code> modelify command line option, 79	<code>-h</code> init command line option, 77
<code>--code-path</code> modelify command line option, 78	<code>-i</code> ui command line option, 78
<code>--conda-env</code> modelify command line option, 78	<code>-p</code> modelify command line option, 78
<code>--copy-mode</code> modelify command line option, 78	<code>-r</code> ui command line option, 78
<code>--env</code> init command line option, 77	<code>-s</code> modelify command line option, 78
<code>--extra-pip-requirements</code> modelify command line option, 79	<code>-s</code> init command line option, 77
<code>--force</code> init command line option, 77	
<code>--host</code> ui command line option, 78	
<code>--infer-input-example</code> modelify command line option, 78	
<code>--infer-signature</code> modelify command line option, 78	
<code>--input-name</code> modelify command line option, 78	

A

`arbitrary_types_allowed` (kedro_mlflow.config.kedro_mlflow_config.RequestHeaderProviderO attribute), 92

C

`copy_mode` (*kedro_mlflow.mlflow.kedro_pipeline_model.KedroPipelineModel* property), 85

`credentials` (*kedro_mlflow.config.kedro_mlflow_config.MlflowServerOptions* attribute), 90

D

DEFAULT_SAVE_MODE (kedro_mlflow.io.metrics.mlflow_metric_dataset.MlflowMetricDataset attribute), 71

dict_params (kedro_mlflow.config.kedro_mlflow_config.MlflowParamsOptions attribute), 89

DictParamsOptions (class in kedro_mlflow.config.kedro_mlflow_config), 86

DictParamsOptions.Config (class in kedro_mlflow.config.kedro_mlflow_config), 86

disable_tracking (kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions attribute), 91

DisableTrackingOptions (class in kedro_mlflow.config.kedro_mlflow_config), 86

DisableTrackingOptions.Config (class in kedro_mlflow.config.kedro_mlflow_config), 86

E

experiment (kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions attribute), 91

ExperimentOptions (class in kedro_mlflow.config.kedro_mlflow_config), 87

ExperimentOptions.Config (class in kedro_mlflow.config.kedro_mlflow_config), 87

extra (kedro_mlflow.config.kedro_mlflow_config.DictParamsOptions.Config attribute), 86

extra (kedro_mlflow.config.kedro_mlflow_config.DisableTrackingOptions.Config attribute), 86

extra (kedro_mlflow.config.kedro_mlflow_config.ExperimentOptions.Config attribute), 87

extra (kedro_mlflow.config.kedro_mlflow_config.KedroMlflowConfig.Config attribute), 88

extra (kedro_mlflow.config.kedro_mlflow_config.MlflowParamsOptions.Config attribute), 89

extra (kedro_mlflow.config.kedro_mlflow_config.MlflowServerOptions.Config attribute), 90

extra (kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions.Config attribute), 91

extra (kedro_mlflow.config.kedro_mlflow_config.RequestHeaderProviderOptions.Config attribute), 92

extra (kedro_mlflow.config.kedro_mlflow_config.RunOptions.Config attribute), 92

extra (kedro_mlflow.config.kedro_mlflow_config.UiOptions.Config attribute), 93

extract_pipeline_artifacts() (kedro_mlflow.mlflow.kedro_pipeline_model.KedroPipelineModel method), 85

F

filter() (kedro_mlflow.pipeline.pipeline_ml.PipelineMLDataset), 80

flatten (kedro_mlflow.config.kedro_mlflow_config.DictParamsOptions attribute), 86

from_inputs() (kedro_mlflow.pipeline.pipeline_ml.PipelineML method), 81

from_nodes() (kedro_mlflow.pipeline.pipeline_ml.PipelineML method), 81

H

host (kedro_mlflow.config.kedro_mlflow_config.UiOptions attribute), 93

I

id (kedro_mlflow.config.kedro_mlflow_config.RunOptions attribute), 92

inference (kedro_mlflow.pipeline.pipeline_ml.PipelineML property), 81

init command line option

- env, 77
- force, 77
- silent, 77
- e, 77
- f, 77
- s, 77

init_kwargs (kedro_mlflow.config.kedro_mlflow_config.RequestHeaderProviderOptions.Config attribute), 92

input_name (kedro_mlflow.pipeline.pipeline_ml.PipelineML property), 81

K

kedro_mlflow.config.kedro_mlflow_config module, 86

kedro_mlflow.io.artifacts.mlflow_artifact_dataset module, 71

kedro_mlflow.io.metrics.mlflow_metric_dataset module, 71

kedro_mlflow.io.metrics.mlflow_metric_history_dataset module, 71

kedro_mlflow.io.models.mlflow_abstract_model_dataset module, 72

kedro_mlflow.io.models.mlflow_model_local_filesystem_dataset module, 75

kedro_mlflow.io.models.mlflow_model_registry_dataset module, 76

kedro_mlflow.io.models.mlflow_model_tracking_dataset module, 73

kedro_mlflow.mlflow.kedro_pipeline_model module, 84

kedro_mlflow.pipeline.pipeline_ml module, 79

kedro_mlflow.pipeline.pipeline_ml_factory

module, 83
 KedroMlflowConfig (class in ke-
 dro_mlflow.config.kedro_mlflow_config),
 87
 KedroMlflowConfig.Config (class in ke-
 dro_mlflow.config.kedro_mlflow_config),
 88
 KedroMlflowPipelineModelError, 79
 KedroPipelineModel (class in ke-
 dro_mlflow.mlflow.kedro_pipeline_model),
 84
 KedroPipelineModelError, 85
 KPM_KWARGS_DEFAULT (ke-
 dro_mlflow.pipeline.pipeline_ml.PipelineML
 attribute), 79
L
 load_context() (kedro_mlflow.mlflow.kedro_pipeline_model.KedroPipelineModel.
 method), 85
 LOG_MODEL_KWARGS_DEFAULT (ke-
 dro_mlflow.pipeline.pipeline_ml.PipelineML
 attribute), 79
 long_params_strategy (ke-
 dro_mlflow.config.kedro_mlflow_config.MlflowParamsOptions
 attribute), 89
M
 mlflow_registry_uri (ke-
 dro_mlflow.config.kedro_mlflow_config.MlflowServerOptions
 attribute), 90
 mlflow_tracking_uri (ke-
 dro_mlflow.config.kedro_mlflow_config.MlflowServerOptions
 attribute), 90
 MlflowAbstractModelDataSet (class in ke-
 dro_mlflow.io.models.mlflow_abstract_model_dataset),
 72
 MlflowArtifactDataSet (class in ke-
 dro_mlflow.io.artifacts.mlflow_artifact_dataset),
 71
 MlflowMetricDataSet (class in ke-
 dro_mlflow.io.metrics.mlflow_metric_dataset),
 71
 MlflowMetricHistoryDataSet (class in ke-
 dro_mlflow.io.metrics.mlflow_metric_history_dataset),
 71
 MlflowModelLocalFileSystemDataSet (class in ke-
 dro_mlflow.io.models.mlflow_model_local_filesystem_dataset),
 75
 MlflowModelRegistryDataSet (class in ke-
 dro_mlflow.io.models.mlflow_model_registry_dataset),
 76
 MlflowModelTrackingDataSet (class in ke-
 dro_mlflow.io.models.mlflow_model_tracking_dataset),
 73
 MlflowParamsOptions (class in ke-
 dro_mlflow.config.kedro_mlflow_config),
 89
 MlflowParamsOptions.Config (class in ke-
 dro_mlflow.config.kedro_mlflow_config),
 89
 MlflowServerOptions (class in ke-
 dro_mlflow.config.kedro_mlflow_config),
 89
 MlflowServerOptions.Config (class in ke-
 dro_mlflow.config.kedro_mlflow_config),
 89
 MlflowTrackingOptions (class in ke-
 dro_mlflow.config.kedro_mlflow_config),
 90
 MlflowTrackingOptions.Config (class in ke-
 dro_mlflow.config.kedro_mlflow_config), 91
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.DictParamsOptions
 attribute), 86
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.DisableTrackingOptions
 attribute), 86
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.ExperimentOptions
 attribute), 87
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.KedroMlflowConfig
 attribute), 88
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.MlflowParamsOptions
 attribute), 89
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.MlflowServerOptions
 attribute), 90
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions
 attribute), 91
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.RequestHeaderProviderC
 attribute), 92
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.RunOptions
 attribute), 92
 model_computed_fields (ke-
 dro_mlflow.config.kedro_mlflow_config.UiOptions
 attribute), 93
 model_config (kedro_mlflow.config.kedro_mlflow_config.DictParamsOpti
 attribute), 86
 model_config (kedro_mlflow.config.kedro_mlflow_config.DisableTracking
 attribute), 86
 model_config (kedro_mlflow.config.kedro_mlflow_config.ExperimentOpti
 attribute), 87
 model_config (kedro_mlflow.config.kedro_mlflow_config.KedroMlflowCon

attribute), 88
 model_config(kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions, attribute), 89
 model_config(kedro_mlflow.config.kedro_mlflow_config.MlflowServerOptions, attribute), 90
 model_config(kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions, attribute), 91
 model_config(kedro_mlflow.config.kedro_mlflow_config.RequestHeaderProviderOptions, attribute), 92
 model_config(kedro_mlflow.config.kedro_mlflow_config.RunOptions, attribute), 92
 model_config(kedro_mlflow.config.kedro_mlflow_config.UiOptions, attribute), 93
 model_fields(kedro_mlflow.config.kedro_mlflow_config.DictParamsOptions, attribute), 86
 model_fields(kedro_mlflow.config.kedro_mlflow_config.DisableTrackingOptions, attribute), 86
 model_fields(kedro_mlflow.config.kedro_mlflow_config.ExperimentOptions, attribute), 87
 model_fields(kedro_mlflow.config.kedro_mlflow_config.KedroMlflowConfig, attribute), 88
 model_fields(kedro_mlflow.config.kedro_mlflow_config.MlflowParamsOptions, attribute), 89
 model_fields(kedro_mlflow.config.kedro_mlflow_config.MlflowServerOptions, attribute), 90
 model_fields(kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions, attribute), 91
 model_fields(kedro_mlflow.config.kedro_mlflow_config.RequestHeaderProviderOptions, attribute), 92
 model_fields(kedro_mlflow.config.kedro_mlflow_config.RunOptions, attribute), 92
 model_fields(kedro_mlflow.config.kedro_mlflow_config.UiOptions, attribute), 93
 model_post_init() (kedro_mlflow.config.kedro_mlflow_config.ExperimentOptions method), 87
 model_post_init() (kedro_mlflow.config.kedro_mlflow_config.MlflowServerOptions method), 90
 model_uri(kedro_mlflow.io.models.mlflow_model_tracking_dataset.MlflowModelTrackingDataset, property), 75
 modelify command line option
 --artifact-path, 78
 --await-registration-for, 79
 --code-path, 78
 --conda-env, 78
 --copy-mode, 78
 --extra-pip-requirements, 79
 --infer-input-example, 78
 --infer-signature, 78
 --input-name, 78
 --pip-requirements, 79
 --pipeline, 78
 --registered-model-name, 78
 --run-id, 78
 --run-name, 78
 -i, 78
 -s, 78
 -r, 78
 kedro_mlflow.config.kedro_mlflow_config,
 kedro_mlflow.io.artifacts.mlflow_artifact_dataset,
 kedro_mlflow.io.metrics.mlflow_metric_dataset,
 kedro_mlflow.io.metrics.mlflow_metric_history_dataset,
 kedro_mlflow.io.models.mlflow_abstract_model_dataset,
 kedro_mlflow.io.models.mlflow_model_local_filesystem_dataset,
 kedro_mlflow.io.models.mlflow_model_registry_dataset,
 kedro_mlflow.io.models.mlflow_model_tracking_dataset,
 kedro_mlflow.mlflow.kedro_pipeline_model,
 kedro_mlflow.pipeline.pipeline_ml, 79
 kedro_mlflow.pipeline.pipeline_ml_factory, 83
 kedro_mlflow.config.kedro_mlflow_config.ExperimentOptions, attribute), 87
 kedro_mlflow.config.kedro_mlflow_config.RunOptions, attribute), 93
 nested(kedro_mlflow.config.kedro_mlflow_config.RunOptions, attribute), 93
 only_nodes() (kedro_mlflow.pipeline.pipeline_ml.PipelineML method), 81
 only_nodes_with_inputs() (kedro_mlflow.pipeline.pipeline_ml.PipelineML method), 82
 only_nodes_with_namespace() (kedro_mlflow.pipeline.pipeline_ml.PipelineML method), 82
 only_nodes_with_outputs() (kedro_mlflow.pipeline.pipeline_ml.PipelineML method), 82
 only_nodes_with_tags() (kedro_mlflow.pipeline.pipeline_ml.PipelineML method), 82
 params(kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions

[attribute](#), 91
[pass_context](#) ([kedro_mlflow.config.kedro_mlflow_config.RequestHeaderProviderOptions](#)
[attribute](#)), 92
[pipeline_ml_factory](#)() (in module [kedro_mlflow.pipeline.pipeline_ml_factory](#)),
83
[PipelineML](#) (class in [kedro_mlflow.pipeline.pipeline_ml](#)), 79
[pipelines](#) ([kedro_mlflow.config.kedro_mlflow_config.DisableTrackingOptions](#)
[attribute](#)), 86
[port](#) ([kedro_mlflow.config.kedro_mlflow_config.UiOptions](#) [ui](#) ([kedro_mlflow.config.kedro_mlflow_config.KedroMlflowConfig](#)
[attribute](#)), 93
[predict](#)() ([kedro_mlflow.mlflow.kedro_pipeline_model.KedroPipelineModel](#)
[method](#)), 85
R
[recursive](#) ([kedro_mlflow.config.kedro_mlflow_config.DictParamsOptions](#)
[attribute](#)), 86
[request_header_provider](#) ([kedro_mlflow.config.kedro_mlflow_config.MlflowServerOptions](#)
[attribute](#)), 90
[RequestHeaderProviderOptions](#) (class in [kedro_mlflow.config.kedro_mlflow_config](#)), 91
[RequestHeaderProviderOptions.Config](#) (class in [kedro_mlflow.config.kedro_mlflow_config](#)), 92
[restore_if_deleted](#) ([kedro_mlflow.config.kedro_mlflow_config.ExperimentOptions](#)
[attribute](#)), 87
[run](#) ([kedro_mlflow.config.kedro_mlflow_config.MlflowTrackingOptions](#) [validate_assignment](#) ([kedro_mlflow.config.kedro_mlflow_config.KedroMlflowConfig.Config](#)
[attribute](#)), 91
[RunOptions](#) (class in [kedro_mlflow.config.kedro_mlflow_config](#)),
92
[RunOptions.Config](#) (class in [kedro_mlflow.config.kedro_mlflow_config](#)),
92
S
[sep](#) ([kedro_mlflow.config.kedro_mlflow_config.DictParamsOptions](#)
[attribute](#)), 86
[server](#) ([kedro_mlflow.config.kedro_mlflow_config.KedroMlflowConfig](#)
[attribute](#)), 89
[setup](#)() ([kedro_mlflow.config.kedro_mlflow_config.KedroMlflowConfig](#)
[method](#)), 89
[SUPPORTED_SAVE_MODES](#) ([kedro_mlflow.io.metrics.mlflow_metric_dataset.MlflowMetricDataset](#)
[attribute](#)), 71
T
[tag](#)() ([kedro_mlflow.pipeline.pipeline_ml.PipelineML](#)
[method](#)), 82
[to_nodes](#)() ([kedro_mlflow.pipeline.pipeline_ml.PipelineML](#)
[method](#)), 83